

! 在使用本产品前请仔细阅读本手册，本将其放在设备附近以备将来参阅。
Before use, please read this manual carefully and be placed nearby to the equipment for future reference



上诚泵阀 因诚而信
Shangcheng Pump and Valve
Being trustworthy because of its sincerity

SHANGHAI
SHANGCHENG
PUMP AND VALVE MANUFACTURING CO.,LTD

ISG 型立式离心泵
I S VERTICAL CENTRIFUGAL PUMP

产品说明书 Product specification



上海上诚泵阀制造有限公司

SHANGHAI SHANGCHENG PUMP AND VALVE MANUFACTURING CO.,LTD

地址 (Add) : 上海市普陀区中山北路1759号
Shanghai Putuo District No. 1759 in
Zhongshan North Road

邮编 (Post) : 200010

电话 (Tel) : 021-68100000

传真 (Fax) : 021-61398677

网址 (Http) : //www.scpv.cn



采用原生态环保纸张印刷 © 版权所有 不得翻录

上海上诚泵阀制造有限公司
SHANGHAI SHANGCHENG PUMP AND VALVE MANUFACTURING CO.,LTD



公司简介 Brief Introduction

上海上诚泵阀制造有限公司是一家集科研、开发、生产、销售于一体的泵阀企业；公司拥有一支经验丰富、勇于实践、不断创新的高素质开发、科研队伍；其中高级工程师2名，研究、设计技术人员35名，生产技术制造人员68名，现有员工总数达298人；公司拥有国内外先进的电脑微机控制性能水泵测试台，使客户更安全、更有效、更放心地使用上诚产品。

公司全面采用 ISO9001：2000《质量管理体系要求》，并有效的实施；自创办以来始终把质量管理作为第一追求目标，发扬拼搏精神，争创一流的精神在泵阀行业中不断发展壮大。

公司主要生产经营各类水泵及配套蝶阀；产品畅销全国各地，广泛应用于石油、化工、电力、造纸、食品、制药、给排水工程等，深受各行业用户的一致好评，上诚秉着“以诚为本，以质取胜”的经营理念，诚心为您提供优质的品牌产品和完美的服务，竭诚欢迎社会各界惠顾合作。

Shanghai Shangcheng Pump and valve manufacturing Co.,Ltd. is an enterprise of Researching, developing, producing and selling; The company has an experienced team to develop high quality products, 2 senior engineers, 35 designing engineers, 68 technicians, which totally amounts to 298; The company has the domestic advanced automatic system to perform water pump test, which can make the customer to use our products safely, effectively and easily.

The ISO 9001:2000 "quality control system request" always be implemented effectively; since our company is opened, the quality control is always our first pursue goal and we are growing strong in the pump and valve industry.

Our main products are pumps and matched valves, which are sold to the strongly all over of China. It can be widely applied to petroleum, chemical industry, electric power, papermaking, food, drugs manufacturing and so on. "Honesty oriented, quality comes first" is our management idea, which sincerely provides the high quality brand product and the consummation service for you.



上诚泵阀 因诚而信
Shangcheng Pump and Valve
Being trustworthy because of its sincerity

ISG型立式离心泵
ISG VERTICAL CENTRIFUGAL PUMP

ISG型单级单吸立式管道式离心泵产品简介

Brief Introduction of ISG Single-Stage Single-Suction Vertical & In-Line Centrifugal Pumps

ISG型立式离心泵 ISG Vertical Centrifugal Pumps



特点 Features

- ISG系列（并派生出IRG型管道热水泵、IHG立式化工泵、YG油泵）单级单吸立式管道式离心泵是我公司利用优秀的水利模型，并根据各类用户在不同使用条件下精心设计而成，符合JB/T53058-93质量标准。
- ISG series (derivate IRG in-line heat exchanger pump, IHG vertical chemical pump and YG oil pump) single-stage single-suction pipeline centrifugal pump is carefully designed by our company utilizing excellent water conservancy models based on different working conditions of various users, which conforms to JB/T53058-93 quality standard.
- ISG (IRG) 系列单级单吸立式管道式离心泵由于电机与泵直联，简化了中间传动的结构，增强了运转的平稳性，轴封采用硬质合金机械密封，无泄漏。泵采用管道式结构，泵的进出口能像阀门一样安装在管路的任何位置及任何方向，与普通卧式泵比占地面积减少了30%，且具有运转噪音低、振动小等特点。易损件的使用寿命大大延长。本型泵以其性能稳定、高效节能、占地面积小、结构紧凑等特点，广受市场青睐。
- The motor and pump are joined directly without transmission parts. So they operate smoothly. The shaft seal is made with hard alloy mechanical seal, therefore, there is no leakage. The inlet and outlet can be fixed anywhere like valves in pipeline. Compared with common horizontal pump, ISG series can decrease 30 percent floor space. Besides, they feature smooth operation and lower noise etc. The life of damageable parts is prolonged. In conclusion, this series pumps are favored in market because of their smooth operation, high efficiency, less energy consumption, small floor space and compact structure.

用途 Applications

- 适用于工业、城市给水、高层建筑供水 Water supply in industry, cities and high-rises;
- 消防管道增压 Fire fighting pipeline pressurizing;
- 冷暖空调冷水循环 Cold and hot water circulation in air-conditioning;
- 远距离输水 Transport water from far away;
- 生产工艺循环增压输送，并适用于各种给排水设备、锅炉等设备的配套使用 Pressurizing transport in industrial circulating system, And all kinds of water supply equipments, boiler etc.

工作条件 Operating Conditions


- 吸排介质的固体不溶物体积不超过体积的1%，粒度 $\leq 0.2\text{mm}$ The volume of non-soluble solid in operating medium can not exceed 1 percent than which of total medium. Besides, granularity should not greater than 0.2mm;
- 流量范围 Capacity range: 2~1800m³/h; 扬程范围 Head range: 5~150m;
- 泵系统最高工作压力 $\leq 1.6\text{MPa}$ ，即吸入压力+泵扬程 $\leq 1.6\text{MPa}$ System Max. working pressure should not be greater than 1.6MPa, namely pressure in suction add to head of head should not be greater than 1.6MPa;
- 介质温度 Liquid temperature: $-15^{\circ}\text{C} < T < +105^{\circ}\text{C}$; 周围环境温度 Ambient temperature: $\leq 40^{\circ}\text{C}$;
- 电机防护等级 Motor's degree of protection: IP54 or IP44; 电机绝缘等级 Motor's class of insulation: F级;

注：特殊温度及压力订货时应另行提出，以便提供更为可靠之产品。

Note: Please elucidate when temperature and pressure are special, so that we can supply you credible products.


ISG型泵型号意义、压力温度图 Designation and Pressure-Temperature Drawing of ISG Pumps

型号意义 Designation

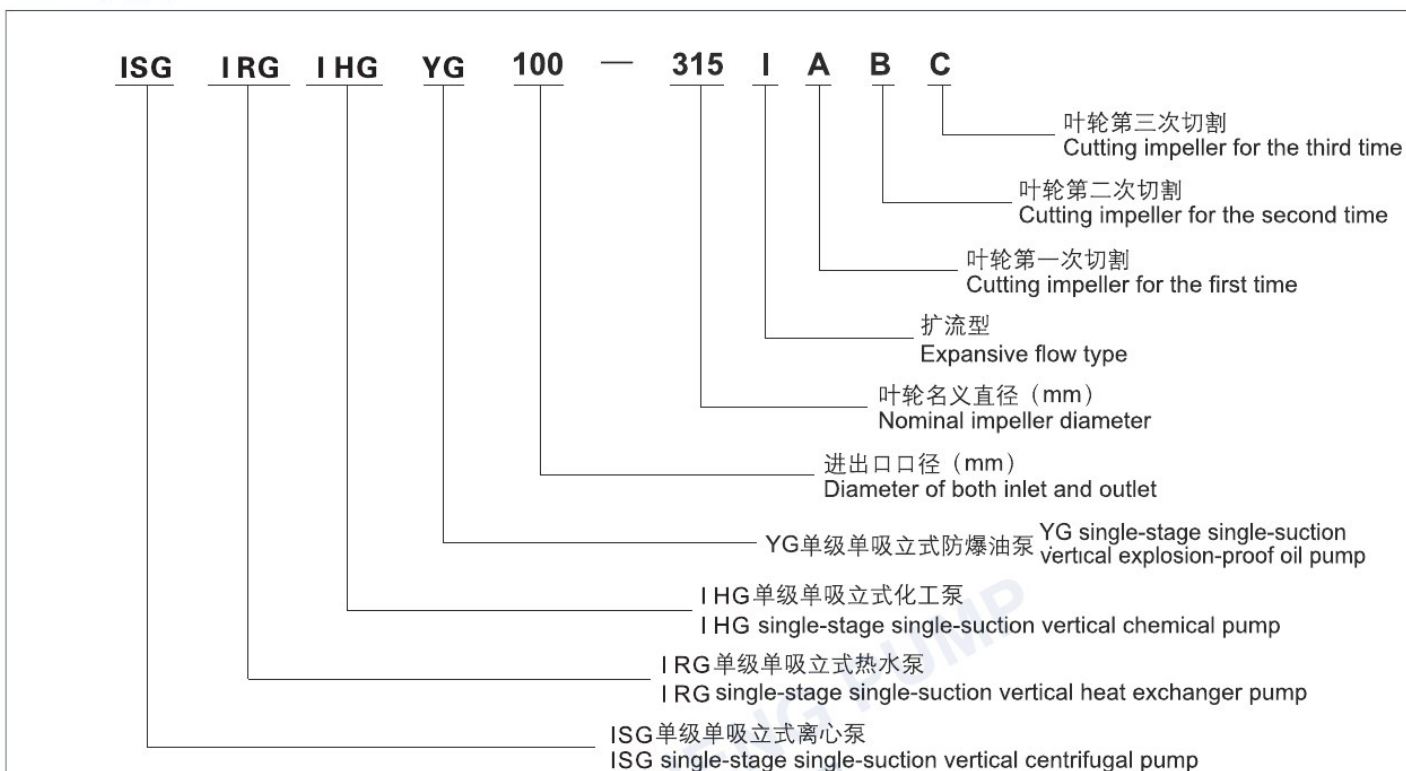


注: IRG立式化工泵、IHG立式热水泵、YG立式防爆油泵性能参数、安装尺寸相同
Note: performance parameters and installation dimensions of IRG vertical chemical pumps, IHG vertical heat exchanger pumps and YG vertical explosion-proof oil pumps are the same.

压力温度图 Pressure-Temperature Drawing

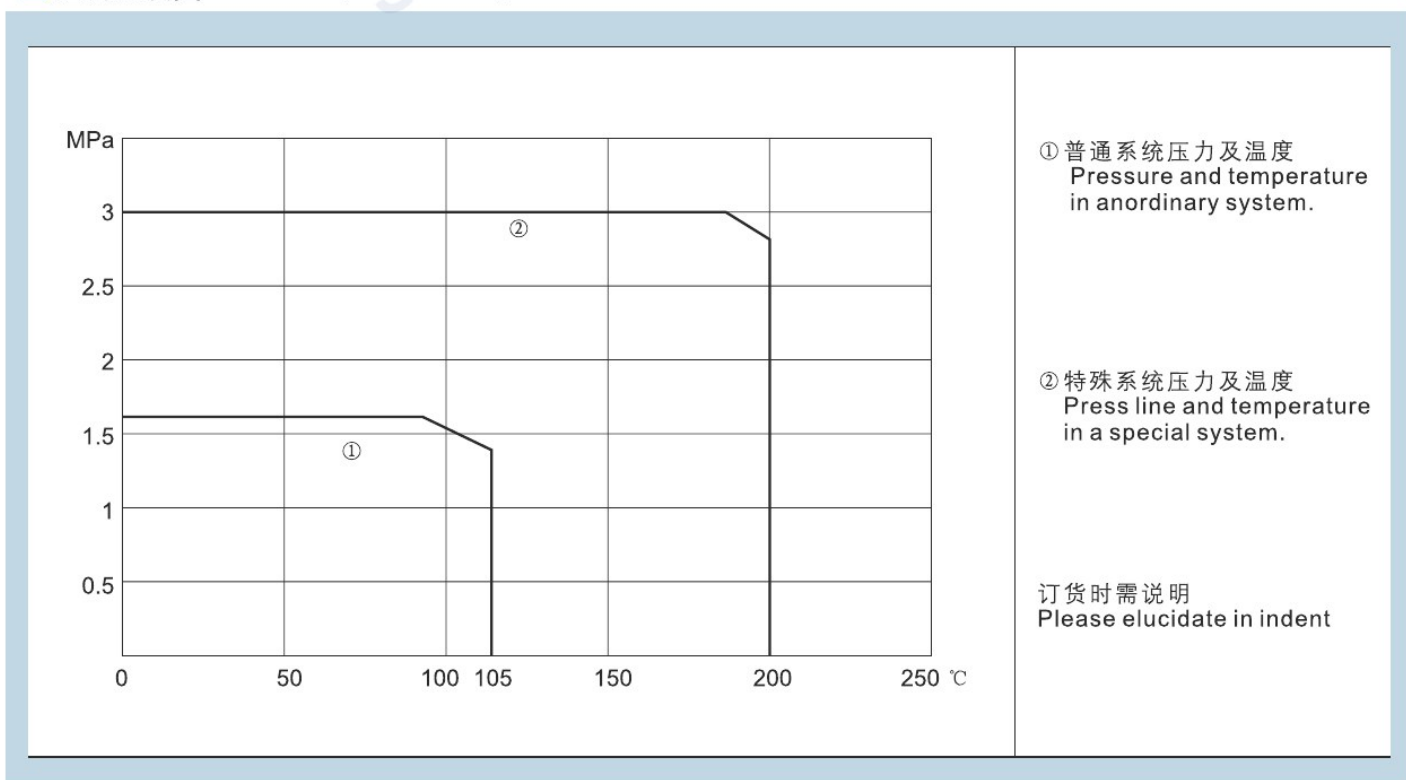


ISG型泵型谱图 Hydraulic Coverage of KCLPumps

型谱图 Hydraulic Coverage

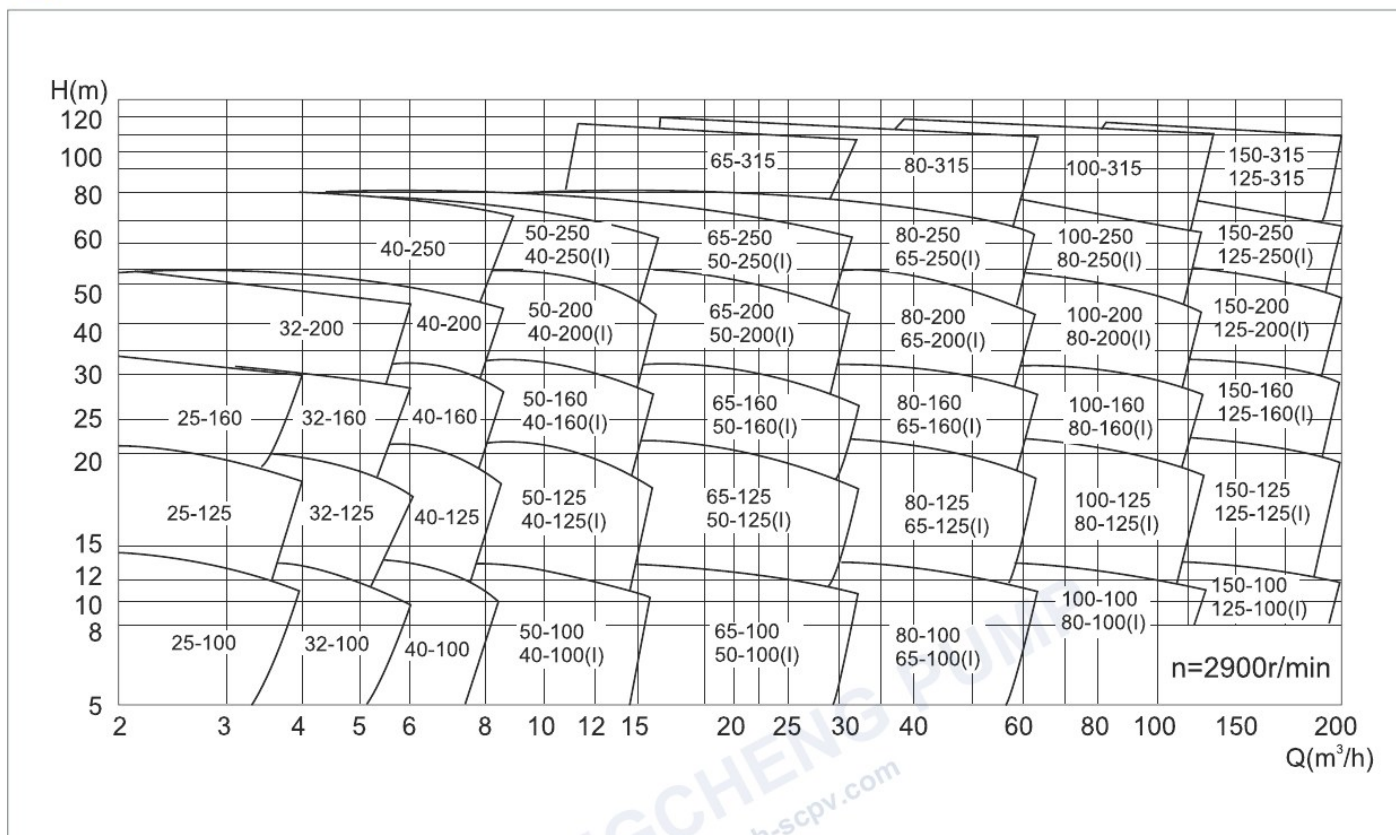


型谱图 Hydraulic Coverage

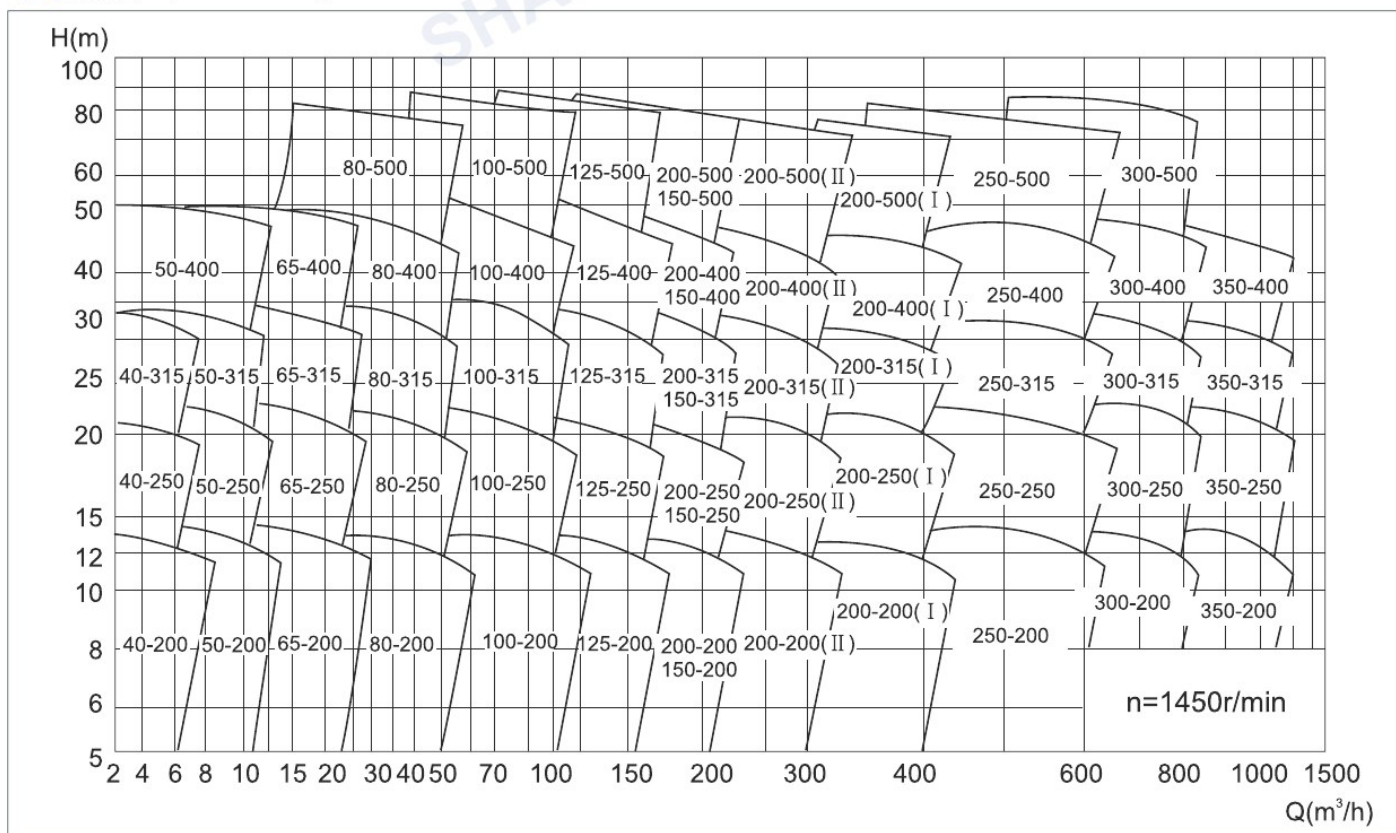

ISG型泵结构图 Structural Drawing of KCL Pumps

结构图 Structural Drawing

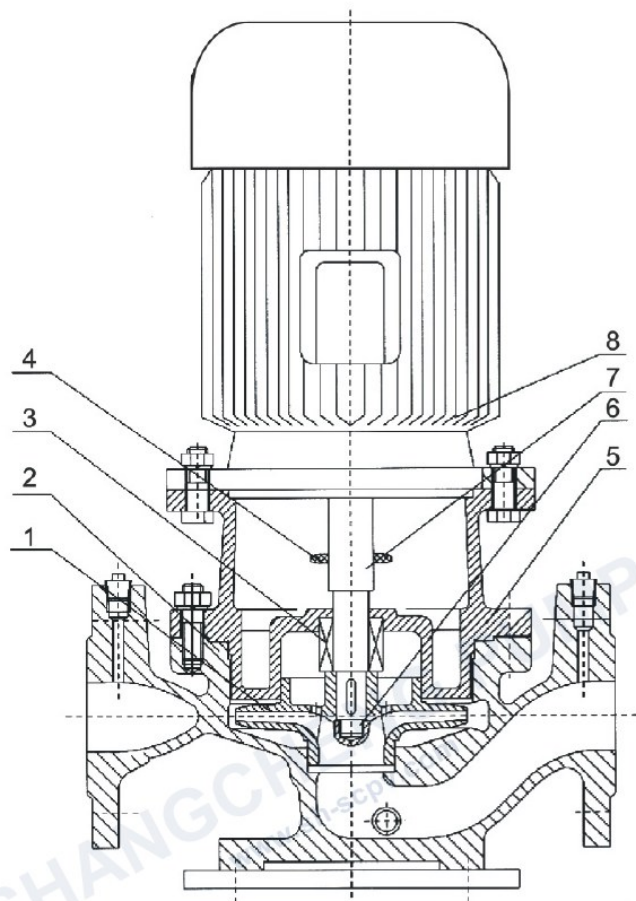


材料表 Materials Table

序号 No.	1	2	3	4	5	6	7	8
名称 Name	叶轮 Impeller	泵体 Casing	机械密封 Mechanical seal	挡水圈 Water-block ring	端盖 Casing cover	叶轮螺母 Impeller nut	泵轴 Pump shaft	电机 Motor
材料 Material	HT200	HT200	碳化硅对石墨 Carborundum	橡胶 Rubber	HT200	45或1Cr13 45 or 1Cr13	45或1Cr13 45 or 1Cr13	Y或Y2 Y or Y2
定制材料 Custom- material	铜/不锈钢 Copper/ Stainless steel	不锈钢 Stainless steel	硬质合金 Hard alloy	橡胶 Rubber	铸铁/不锈钢 Cast iron/ Stainless steel	不锈钢 Stainless steel	不锈钢 Stainless steel	YB

注: 定制材料: 不锈钢 (304、305、316、316L)
Note: tailored material: stainless steel

ISG型泵性能参数表、安装尺寸图及安装尺寸表 Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of ISG Pumps

安装尺寸图 Installation Dimensions Drawing

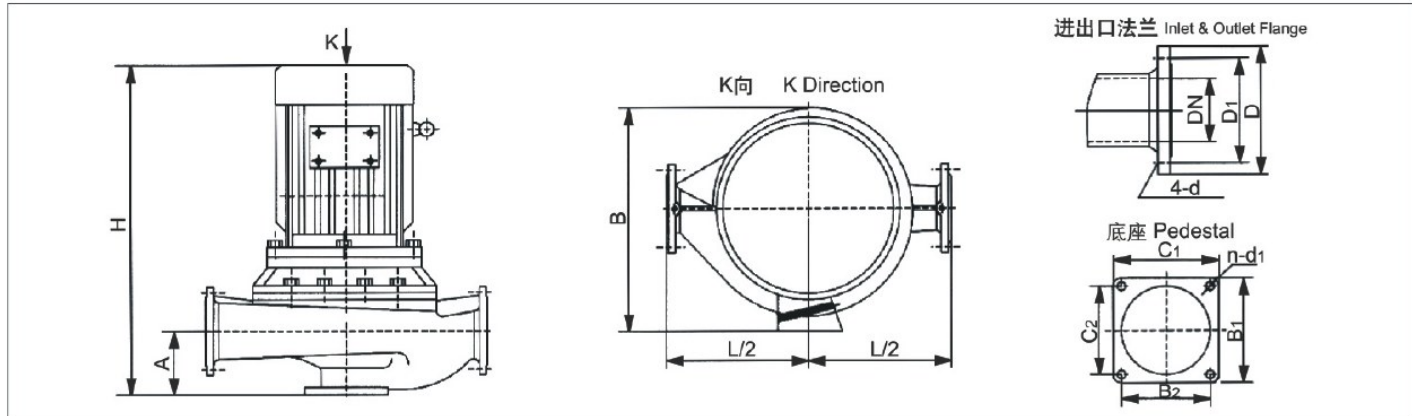


性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow	Head (m)	效率 Efficiency	r/min speed	电机功率 Motor Power	(NPSH) _r (m)	Weight (kg)	外形尺寸 Outline Dimensions	安装尺寸 Installation Dimensions	进出口法兰尺寸 Inlet & Outlet Flange Dimensions	隔振器(垫) Vibration Isolator
泵型号	m³/h L/S	扬程 m	效率 %	转速 r/min	电机功率 kW	必需汽蚀余量 head required	重量	L B H C1×B1	A C2×B2 n-d1	D D1 DN 4-d	规格Spec
25-160	2.8 4.0 5.2	0.78 1.11 1.44	33 32 30	24 32 33	2900 1.5	2.3	39	300 270 440 90×130	65 60×100 4-φ14	φ115 φ85 25 4-φ14	SD41-0.5
25-160A	2.6 3.7 4.9	0.12 1.03 1.36	29 28 26	27 31 29	2900 1.1	2.3	34	300 270 415 90×130	65 60×100 4-φ14	φ115 φ85 25 4-φ14	SD41-0.5
32-100	3.5 4.5 5.3	0.97 1.24 1.47	14.5 12.5 11	35 40 38	2900 0.55	2.3	28	260 230 435 90×130	80 60×100 4-φ14	φ140 φ100 32 4-φ18	SD41-0.5
32-125	3.5 5.0 6.5	0.97 1.39 1.80	22 20 18	40 44 42	2900 1.1	2.3	28	260 230 435 90×130	80 60×100 4-φ14	φ140 φ100 32 4-φ18	SD41-0.5
32-125A	3.1 4.5 5.8	0.86 1.25 1.61	17.6 16.0 14.4	39 43 40	2900 0.75	2.3	28	260 230 435 90×130	80 60×100 4-φ14	φ140 φ100 32 4-φ18	SD41-0.5
32-160	4.4 6.3 8.3	1.22 1.75 2.32	28 32 30	40 44 42	2900 1.5	2.3	39	320 270 460 100×150	90 60×110 4-φ14	φ140 φ100 32 4-φ18	SD41-0.5
32-160A	2.8 4.0 5.2	0.78 1.11 1.44	27 25 21	31 34 32	2900 1.1	2.0	38	320 270 435 100×150	90 60×110 4-φ14	φ140 φ100 32 4-φ18	SD41-0.5
32-200	3.1 4.5 5.8	0.86 1.25 1.61	50.5 50.0 48.0	28 32 30	2900 3	2.0	55	340 330 530 120×170	85 80×130 4-φ14	φ140 φ100 32 4-φ18	SD61-0.5
32-200A	2.8 4.0 5.2	0.78 1.11 1.44	44.6 44 42.7	34 40 42	2900 2.2	2.0	74	340 330 490 120×170	85 80×130 4-φ14	φ140 φ100 32 4-φ18	SD61-0.5
32-160(I)	4.4 6.3 8.3	1.22 1.75 2.32	33.2 32 30.2	34 40 42	2900 2.2	2.0	47	320 270 485 100×150	90 60×110 4-φ14	φ140 φ100 32 4-φ18	SD61-0.5
32-200(I)	4.4 6.3 8.3	1.22 1.75 2.32	50.5 50.0 48.0	26 33 35	2900 4	2.0	43	340 330 550 120×170	85 80×130 4-φ14	φ140 φ100 32 4-φ18	SD61-0.5
40-100	4.4 6.3 8.3	1.22 1.75 2.31	13.2 12.5 11.3	48 54 53	2900 0.55	2.3	32	260 230 435 100×150	85 60×110 4-φ14	φ150 φ110 40 4-φ18	SD61-0.5
40-100A	3.9 5.6 7.4	1.08 1.56 2.06	10.6 10.0 9.0	48 52 50	2900 0.55	2.3	32	260 230 435 100×150	85 60×110 4-φ14	φ150 φ110 40 4-φ18	SD61-0.5
40-125	4.4 6.3 8.3	1.22 1.75 2.31	21 20 18	41 46 43	2900 1.1	2.3	34	280 230 445 100×150	85 60×110 4-φ14	φ150 φ110 40 4-φ18	SD41-0.5
40-125A	3.9 5.6 7.4	1.08 1.56 2.06	17.6 16 14.4	40 45 41	2900 0.75	2.3	33	280 230 445 100×150	85 60×110 4-φ14	φ150 φ110 40 4-φ18	SD41-0.5
40-160	4.4 6.3 8.3	1.22 1.75 2.31	33 32 30	35 40 40	2900 2.2	2.3	47	320 270 490 100×150	90 60×110 4-φ14	φ150 φ110 40 4-φ18	SD41-0.5
40-160A	4.1 5.9 7.8	1.14 1.64 2.17	29 28 26.3	34 39 39	2900 1.5	2.3	43	320 270 465 100×150	90 60×110 4-φ14	φ150 φ110 40 4-φ18	SD61-0.5
40-160B	3.8 5.5 7.2	1.06 1.53 2.0	25.5 24 22.5	34 38 37	2900 1.1	2.3	38	320 270 440 100×150	90 60×110 4-φ14	φ150 φ110 40 4-φ18	SD61-0.5

ISG 型泵性能参数表、安装尺寸图及安装尺寸表 Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of ISG Pumps

■ 安装尺寸图 Installation Dimensions Drawing

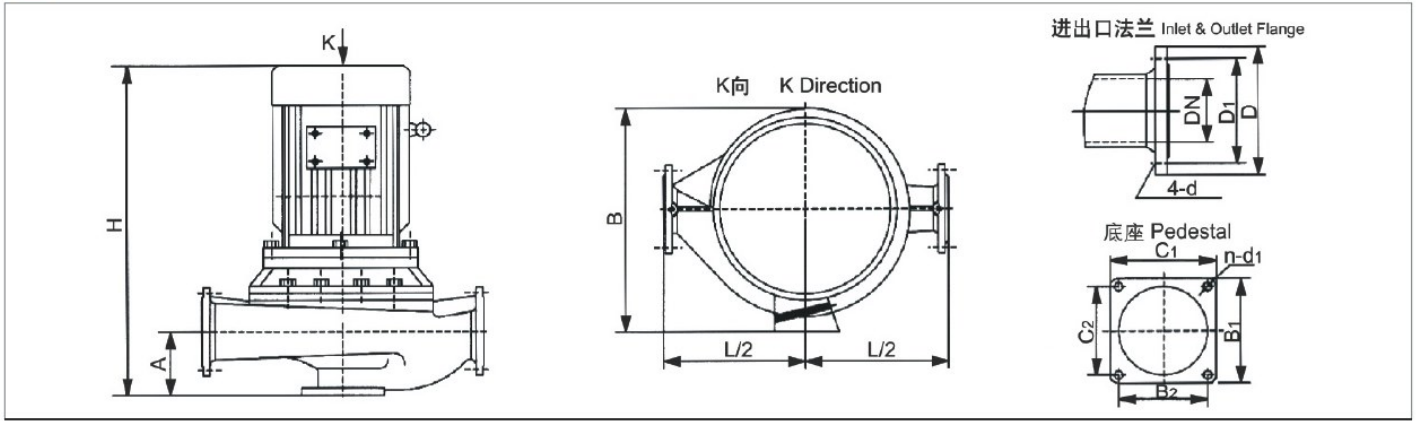


■ 性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow	Head (m)	Efficiency %	r/min speed	Motor Power kW	(NPSH) _r (m) net positive suction head required	Weight (kg)	外形尺寸 Outline Dimensions	安装尺寸 Installation Dimensions	进出口法兰尺寸 Inlet & Outlet Flange Dimensions	隔振器(垫) Vibration isolator
泵型号	m³/h L/S	扬程 m	效率 %	转速 r/min	电机功率 kW	必需汽蚀余量 m	重量	L B H C1×B1	A C2×B2 n-d1	D D1 DN 4-d	规格Spec
40-200	4.4 6.3 8.3	1.22 1.75 2.31	51 50 48	26 33 32	2900 4	2.3	74	340 330 555 120×170	95 80×130 4-φ14	φ150 φ110 40 4-φ18	SD61-0.5
40-200A	4.1 5.9 7.8	1.14 1.64 2.17	45 44 42	26 31 30	2900 3	2.3	62	340 330 535 120×170	95 80×130 4-φ14	φ150 φ110 40 4-φ18	SD61-0.5
40-200B	3.7 5.3 7.0	1.03 1.47 1.94	38 36 34.5	25 29 27	2900 2.2	2.3	52	340 330 485 120×170	95 80×130 4-φ14	φ150 φ110 40 4-φ18	SD61-0.5
40-250	4.4 6.3 8.3	1.22 1.75 2.31	82 80 74	24 28 28	2900 7.5	2.3	105	400 405 655 120×170	95 80×130 4-φ14	φ150 φ110 40 4-φ18	SD61-0.5
40-250A	4.1 5.9 7.8	1.14 1.64 2.17	72 70 65	24 28 27	2900 5.5	2.3	98	400 405 615 120×170	95 80×130 4-φ14	φ150 φ110 40 4-φ18	SD61-0.5
40-250B	3.8 5.5 7.0	1.06 1.53 1.94	61.5 60 56	23 27 26	2900 4	2.3	77	400 405 560 120×170	95 80×130 4-φ14	φ150 φ110 40 4-φ18	SD61-0.5
40-100(I)	8.8 12.5 16.3	2.44 3.47 4.53	13.2 12.5 11.3	55 62 60	2900 1.1	2.3	34	300 230 460 120×170	100 80×130 4-φ14	φ150 φ110 40 4-φ18	SD61-0.5
40-100(I)A	8.0 11.0 14.5	2.22 3.05 4.03	10.6 10.0 9.0	57 60 59	2900 0.75	2.3	32	300 230 460 120×170	100 80×130 4-φ14	φ150 φ110 40 4-φ18	SD61-0.5
40-125(I)	8.8 12.5 16.3	2.44 3.47 4.53	21.2 20.0 17.8	49 58 57	2900 1.5	2.3	38	305 240 520 120×170	95 80×130 4-φ14	φ150 φ110 40 4-φ18	SD41-0.5
40-125(I)A	8.0 11.0 14.5	2.22 3.05 4.03	17.0 16.0 14.0	53 57 55	2900 1.1	2.3	33	305 240 505 120×170	95 80×130 4-φ14	φ150 φ110 40 4-φ18	SD41-0.5
40-160(I)	8.8 12.5 16.3	2.44 3.47 4.53	33 32 30	45 52 51	2900 3	2.3	56	340 300 550 120×170	100 80×130 4-φ14	φ150 φ110 40 4-φ18	SD61-0.5
40-160(I)A	8.2 11.7 15.2	2.28 3.25 4.22	29 28 26	44 51 50	2900 2.2	2.3	47	340 300 515 120×170	100 80×130 4-φ14	φ150 φ110 40 4-φ18	SD61-0.5
40-160(I)B	7.3 10.4 13.5	2.38 2.89 3.75	23 22 20.5	44 51 50	2900 1.5	2.3	43	340 300 490 120×170	100 80×130 4-φ14	φ150 φ110 40 4-φ18	SD61-0.5
40-200(I)	8.8 12.5 16.3	2.44 3.47 4.53	51.2 50 48	38 46 46	2900 5.5	2.3	85	360 350 630 120×170	100 80×130 4-φ14	φ150 φ110 40 4-φ18	SD61-0.5
40-200(I)A	8.3 11.7 15.3	2.31 3.25 4.25	45.0 44 45	37 45 45	2900 4	2.3	75	360 350 570 120×170	100 80×130 4-φ14	φ150 φ110 40 4-φ18	SD61-0.5
40-200(I)B	7.5 10.6 13.8	2.08 2.94 3.83	37 38 34	44 45 45	2900 3	2.3	63	360 350 550 120×170	100 80×130 4-φ14	φ150 φ110 40 4-φ18	SD61-0.5
40-250(I)	8.8 12.5 16.3	2.44 3.47 4.53	81.2 80 77.5	31 38 40	2900 11	2.3	145	460 430 780 160×220	120 120×180 4-φ18	φ150 φ110 40 4-φ18	JSD2-3
40-250(I)A	8.2 11.6 15.2	2.28 3.22 4.22	71.0 70 68	38 38 38	2900 7.5	2.3	95	460 360 650 160×220	120 120×180 4-φ18	φ150 φ110 40 4-φ18	JSD2-3

ISG 型泵性能参数表、安装尺寸图及安装尺寸表 Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of ISG Pumps

■ 安装尺寸图 Installation Dimensions Drawing

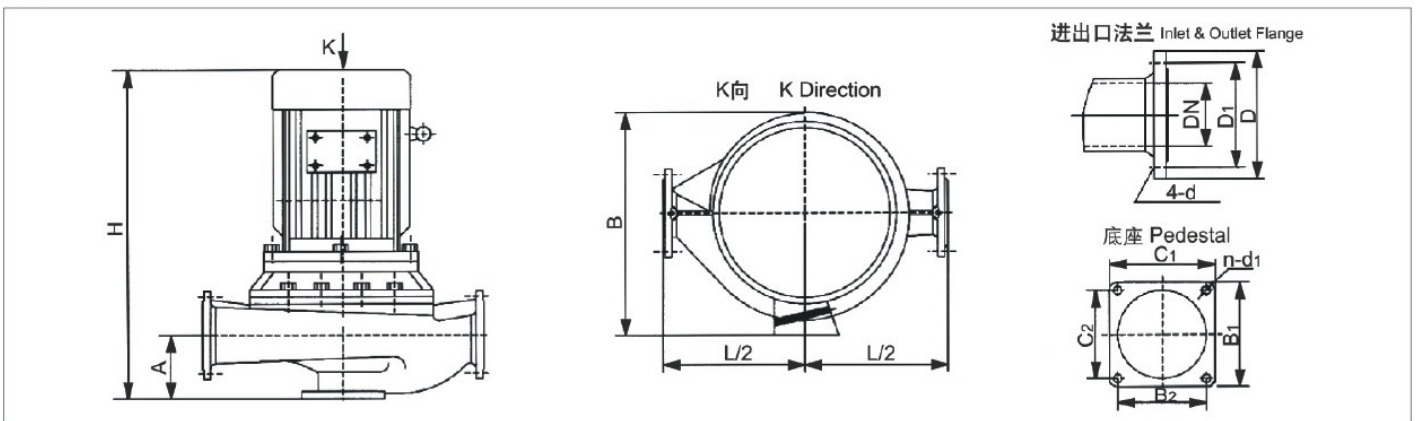


■ 性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow	Head (m)	Efficiency %	r/min speed	Motor Power kW	(NPSH) _r (m) net positive suction head required	Weight (kg)	外形尺寸 Outline Dimensions	安装尺寸 Installation Dimensions	进出口法兰尺寸 Inlet & Outlet Flange Dimensions	隔振器(垫) Vibration isolator
泵型号	m³/h L/S	扬程 m	效率 %	转速 r/min	电机功率 kW	必需汽蚀余量 m	重量	L B H C1×B1	A C2×B2 n-d1	D D1 DN 4-d	规格Spec
40-250(I)B	7.6 10.8 14	2.11 3.0 3.89	61.4 60 58	37 60 58	2900 7.5	2.3	94	460 360 650 160×220	120 120×180 4-φ18	φ150 φ110 40 4-φ18	JSD2-3
40-250(I)C	7.1 10.0 13.1	1.97 2.78 3.64	53.2 52 50.4	36 52 50.4	2900 5.5	2.3	88	460 360 650 160×220	120 120×180 4-φ18	φ150 φ110 40 4-φ18	JSD2-3
50-100	8.8 12.5 16.3	2.44 3.47 4.53	13.6 12.5 11.3	55 62 60	2900 1.1	2.3	36	290 230 455 100×150	95 60×110 4-φ14	φ165 φ125 50 4-φ18	SD41-0.5
50-100A	8 11 14.5	2.22 3.05 4.03	11 10 9	60 58 57	2900 0.75	2.3	35	290 230 455 100×150	95 60×110 4-φ14	φ165 φ125 50 4-φ18	SD41-0.5
50-125	8.8 12.5 16.3	2.44 3.47 4.53	21.5 20 17.8	49 58 57	2900 1.5	2.3	43	300 240 470 100×150	95 60×110 4-φ14	φ165 φ125 50 4-φ18	SD41-0.5
50-125A	8 11 14.5	2.22 3.05 4.03	17 16 14	57 57 57	2900 1.1	2.3	38	300 240 455 100×150	95 60×110 4-φ14	φ165 φ125 50 4-φ18	SD41-0.5
50-160	8.8 12.5 16.3	2.44 3.47 4.53	33 32 30	45 52 51	2900 3	2.3	59	320 300 540 120×170	100 80×130 4-φ14	φ165 φ125 50 4-φ18	SD61-0.5
50-160A	8.2 11.7 15.2	2.28 3.25 4.22	29 28 26	44 52 50	2900 2.2	2.3	51	320 300 500 120×170	100 80×130 4-φ14	φ165 φ125 50 4-φ18	SD61-0.5
50-160B	7.3 10.4 13.5	2.38 2.89 3.75	23 22 20.5	44 51 50	2900 1.5	2.3	47	320 300 475 120×170	100 80×130 4-φ14	φ165 φ125 50 4-φ18	SD61-0.5
50-200	8.8 12.5 16.3	2.44 3.47 4.53	52 50 48	38 46 46	2900 5.5	2.3	101	360 350 615 120×170	100 80×130 4-φ14	φ165 φ125 50 4-φ18	SD61-0.5
50-200A	8.3 11.7 15.3	2.31 3.25 4.25	45.8 44 45	37 45 45	2900 4	2.3	80	360 350 560 120×170	100 80×130 4-φ14	φ165 φ125 50 4-φ18	SD61-0.5
50-200B	7.5 10.6 13.8	2.08 2.94 3.83	37 36 34	44 45 45	2900 3	2.3	68	360 350 540 120×170	100 80×130 4-φ14	φ165 φ125 50 4-φ18	SD61-0.5
50-250	8.8 12.5 16.3	2.44 3.47 4.53	82 80 77.5	29 38 40	2900 11	2.3	160	440 430 750 140×200	105 100×160 4-φ18	φ165 φ125 50 4-φ18	JGD2-3
50-250A	8.2 11.6 15.2	2.28 3.22 4.22	71.5 70 68	38 38 38	2900 7.5	2.3	115	440 360 650 140×200	105 100×160 4-φ18	φ165 φ125 50 4-φ18	JGD2-3
50-250B	7.6 10.8 14	2.11 3.0 3.89	61.4 60 58	37 60 58	2900 7.5	2.3	114	440 360 650 140×200	105 100×160 4-φ18	φ165 φ125 50 4-φ18	JGD2-3
50-250C	7.1 10.0 13.1	1.97 2.78 3.64	53.2 52 50.4	36 52 50.4	2900 5.5	2.3	108	440 360 650 140×200	105 100×160 4-φ18	φ165 φ125 50 4-φ18	JGD2-3
50-100(I)	17.5 25 32.5	4.86 6.94 9.03	13.7 12.5 10.5	67 69 69	2900 1.5	2.5	41	320 235 470 140×200	105 100×160 4-φ18	φ165 φ125 50 4-φ18	SD41-0.5
50-100(I)A	15.6 22.3 29	4.3 6.19 8.1	11 10 8.4	65 67 68	2900 1.1	2.5	36	320 235 455 140×200	105 100×160 4-φ18	φ165 φ125 50 4-φ18	SD41-0.5

ISG 型泵性能参数表、安装尺寸图及安装尺寸表 Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of ISG Pumps

■ 安装尺寸图 Installation Dimensions Drawing

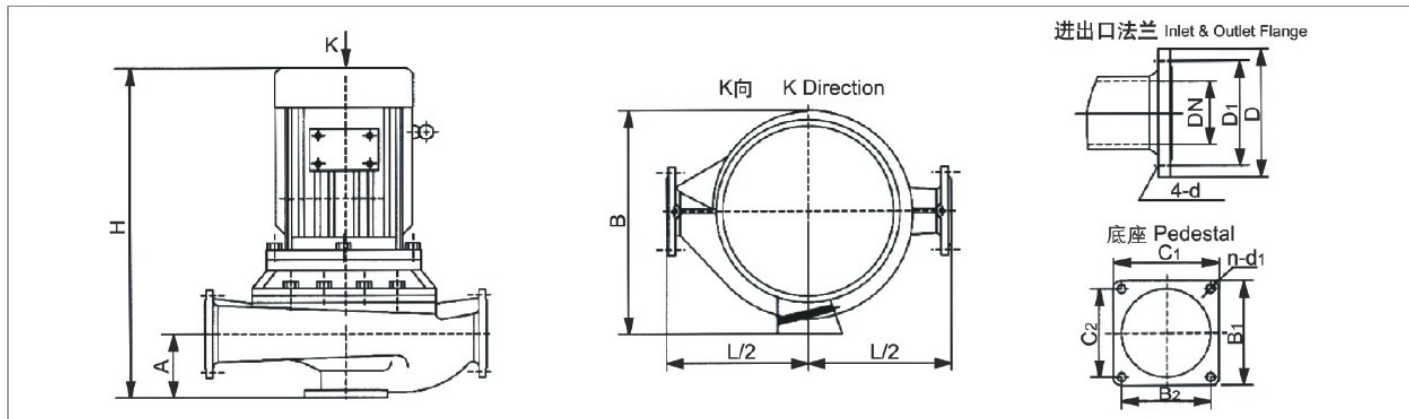


■ 性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow	Head (m)	Efficiency %	r/min speed	Motor Power kW	(NPSH) _r (m) not positive suction head required	Weight (kg)	外形尺寸 Outline Dimensions	安装尺寸 Installation Dimensions	进出口法兰尺寸 Inlet & Outlet Flange Dimensions	隔振器(垫) Vibration Isolator 规格Spec
泵型号	m³/h L/S	扬程 m	效率 %	转速 r/min	电机功率 kW	必需汽蚀余量 m	重量	L B H C1×B1	A C2×B2 n-d1	D D1 DN 4-d	
50-125(I)	17.5 25 32.5	4.86 6.94 9.03	21.5 20 18	60 68 67	2900 3	2.5	56	340 280 550 140×200	95 100×160 4-φ18	φ165 φ125 50 4-φ18	SD61-0.5
50-125(I)A	15.6 22.3 29	4.33 6.19 8.1	17 16 13.6	58 66 65	2900 2.2	2.5	48	340 280 515 140×200	95 100×160 4-φ18	φ165 φ125 50 4-φ18	SD61-0.5
50-160(I)	17.5 25 32.5	4.86 6.94 9.03	34.4 32 27.5	54 63 60	2900 4	2.5	72	360 305 570 140×200	100 100×160 4-φ18	φ165 φ125 50 4-φ18	SD61-0.5
50-160(I)A	16.4 23.4 30.4	4.56 6.5 8.44	30 28 24	54 62 59	2900 4	2.5	71	360 305 570 140×200	100 100×160 4-φ18	φ165 φ125 50 4-φ18	SD61-0.5
50-160(I)B	15.0 21.6 28	4.17 6.0 7.78	26 24 20.6	58 57 55	2900 3	2.5	59	360 305 550 140×200	100 100×160 4-φ18	φ165 φ125 50 4-φ18	SD61-0.5
50-200(I)	17.5 25 32.5	4.86 6.94 9.03	52.7 50 45.5	49 58 59	2900 7.5	2.5	108	380 350 635 140×200	105 100×160 4-φ18	φ165 φ125 50 4-φ18	SD61-0.5
50-200(I)A	16.4 23.5 30.5	4.56 6.53 8.47	46.4 44 40	48 57 58	2900 7.5	2.5	107	380 350 635 140×200	105 100×160 4-φ18	φ165 φ125 50 4-φ18	SD61-0.5
50-200(I)B	15.2 21.8 28.3	4.22 6.06 7.86	40 38 34.5	55	2900 5.5	2.5	100	380 350 635 140×200	105 100×160 4-φ18	φ165 φ125 50 4-φ18	SD61-0.5
50-250(I)	17.5 25 32.5	4.86 6.94 9.03	82 80 76.5	39 50 52	2900 15	2.5	175	460 435 785 160×220	110 120×180 4-φ18	φ165 φ125 50 4-φ18	JGD2-3
50-250(I)A	16.4 23.4 30.5	4.56 6.5 8.47	71.5 70 67	39 50 52	2900 11	2.5	165	460 435 785 160×220	110 120×180 4-φ18	φ165 φ125 50 4-φ18	JGD2-3
50-250(I)B	15 21.6 28	4.17 6.0 7.78	61 60 57.4	38 49 54	2900 11	2.5	165	460 435 785 160×220	110 120×180 4-φ18	φ165 φ125 50 4-φ18	JGD2-3
50-315(I)	17.5 25 32.5	4.86 6.94 9.03	128 125 122	30 40 44	2900 30	2.5	310	550 510 920 190×280	110 150×240 4-φ18	φ165 φ125 50 4-φ18	JGD2-3
50-315(I)A	16.6 23.7 31	4.61 6.58 8.6	115 113 110	30 40 44	2900 22	2.5	245	550 470 855 190×280	110 150×240 4-φ18	φ165 φ125 50 4-φ18	JGD2-3
50-315(I)B	15.7 22.5 29.2	4.36 6.25 8.0	103 101 98	39	2900 22	2.5	215	550 435 830 190×280	110 150×240 4-φ18	φ165 φ125 50 4-φ18	JGD2-3
50-315(I)C	14.4 20.6 26.8	4.0 5.72 7.44	86 85 83	38	2900 18.5	2.5	195	550 435 785 190×280	110 150×240 4-φ18	φ165 φ125 50 4-φ18	JGD2-3
65-100	17.5 25 32.5	4.86 6.94 9.03	13.7 12.5 10.5	67 69 69	2900 1.5	2.5	46	320 235 475 140×200	105 100×160 4-φ18	φ185 φ145 65 4-φ18	SD41-0.5
65-100A	15.6 22 29	4.3 6.19 8.1	11 10 8.4	65 67 68	2900 1.1	2.5	41	320 235 460 140×200	105 100×160 4-φ18	φ185 φ145 65 4-φ18	SD41-0.5

ISG 型泵性能参数表、安装尺寸图及安装尺寸表 Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of ISG Pumps

■ 安装尺寸图 Installation Dimensions Drawing

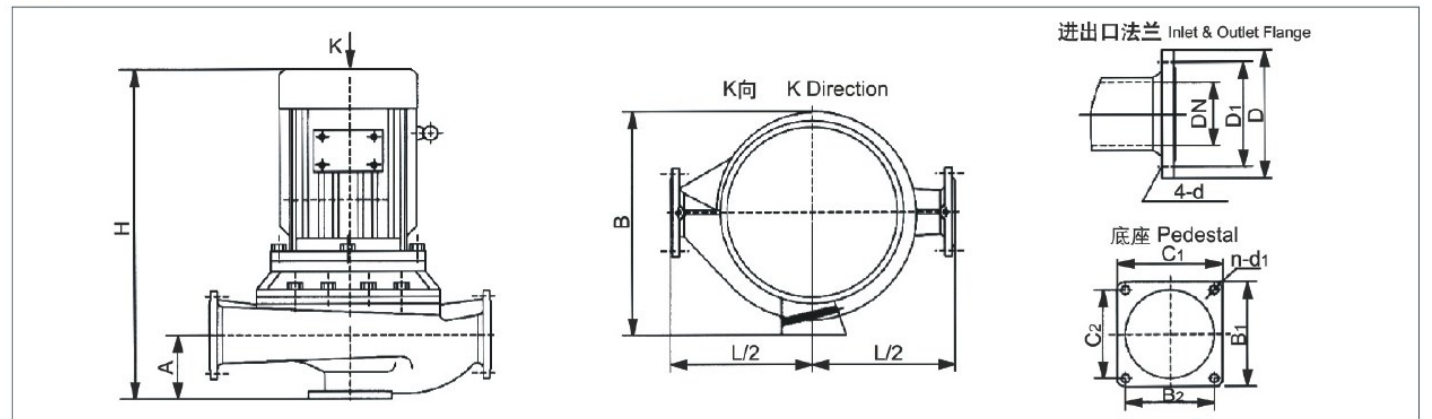


■ 性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow	Head (m)	Efficiency %	r/min speed	Motor Power kW	(NPSH) _r (m) not positive suction head required	Weight (kg)	外形尺寸 Outline Dimensions	安装尺寸 Installation Dimensions	进出口法兰尺寸 Inlet & Outlet Flange Dimensions	隔振器(垫) Vibration Isolator 规格Spec
泵型号	m³/h L/S	扬程 m	效率 %	转速 r/min	电机功率 kW	必需汽蚀余量 m	重量	L B H C1×B1	A C2×B2 n-d1	D D1 DN 4-d	
65-125	17.5 25 32.5	4.86 6.94 9.03	21.5 20 18	60 68 67	2900 3	2.5	58	340 280 550 140×200	100 100×160 4-φ18	φ185 φ145 65 4-φ18	SD61-0.5
65-125A	15.6 22.3 29	4.33 6.19 8.1	17 16 14.4	58 66 65	2900 2.2	2.5	49	340 280 510 140×200	100 100×160 4-φ18	φ185 φ145 65 4-φ18	SD61-0.5
65-160	17.5 25 32.5	4.86 6.94 9.03	34.4 32 27.5	54 63 60	2900 4	2.5	75	360 305 570 140×200	100 100×160 4-φ18	φ185 φ145 65 4-φ18	SD61-0.5
65-160A	16.4 23.4 30.4	4.56 6.5 8.44	30 28 24	54 62 59	2900 4	2.5	75	360 305 570 140×200	100 100×160 4-φ18	φ185 φ145 65 4-φ18	SD61-0.5
65-160B	15.0 21.6 28	4.17 6.0 7.78	26 24 20.6	58 57 55	2900 3	2.5	63	360 305 550 140×200	100 100×160 4-φ18	φ185 φ145 65 4-φ18	SD61-0.5
65-200	17.5 25 32.5	4.86 6.94 9.03	52.7 50 45.5	49 58 59	2900 7.5	2.5	107	380 350 625 140×200	105 100×160 4-φ18	φ185 φ145 65 4-φ18	SD61-0.5
65-200A	16.4 23.5 30.5	4.56 6.53 8.47	46.4 44 40	48 57 58	2900 7.5	2.5	107	380 350 625 140×200	105 100×160 4-φ18	φ185 φ145 65 4-φ18	SD61-0.5
65-200B	15.2 21.8 28.3	4.22 6.06 7.86	40 38 34.5	55	2900 5.5	2.5	100	380 350 625 140×200	105 100×160 4-φ18	φ185 φ145 65 4-φ18	SD61-0.5
65-250	17.5 25 32.5	4.86 6.94 9.03	82 80 76.5	39 50 52	2900 15	2.5	180	480 435 785 160×220	110 120×180 4-φ18	φ185 φ145 65 4-φ18	JGD2-3
65-250A	16.4 23.4 30.5	4.56 6.5 8.47	71.5 70 67	39 50 52	2900 11	2.5	170	480 435 785 160×220	110 120×180 4-φ18	φ185 φ145 65 4-φ18	JGD2-3
65-250B	15 21.6 28	4.17 6.0 7.78	60 61 57.4	38 49 54	2900 11	2.5	170	480 435 785 160×220	110 120×180 4-φ18	φ185 φ145 65 4-φ18	JGD2-3
65-315	17.5 25 32.5	4.86 6.94 9.03	127 125 122	32 40 44	2900 30	2.5	320	550 510 945 190×280	110 150×240 4-φ18	φ185 φ145 65 4-φ18	JGD2-3
65-315A	16.6 23.7 31	4.61 6.58 8.6	115 113 110	32 40 44	2900 22	2.5	255	550 470 840 190×280	110 150×240 4-φ18	φ185 φ145 65 4-φ18	JGD2-3
65-315B	15.7 22.5 29.2	4.36 6.25 8.0	103 101 98	39	2900 18.5	2.5	225	550 435 820 190×280	110 150×240 4-φ18	φ185 φ145 65 4-φ18	JGD2-3
65-315C	14.4 20.6 26.8	4.0 5.72 7.44	86 85 83	38	2900 15	2.5	205	550 435 775 190×280	110 150×240 4-φ18	φ185 φ145 65 4-φ18	JGD2-3
65-100(I)	35 50 65	9.72 13.9 18.1	13.8 12.5 10	67 73 70	2900 3	3.0	63	400 285 570 140×200	120 100×160 4-φ18	φ185 φ145 65 4-φ18	SD61-0.5
65-100(I)A	31.3 44.7 58	8.7 12.4 16.1	11 10 8	66 72 69	2900 2.2	3.0	53	400 245 530 140×200	120 100×160 4-φ18	φ185 φ145 65 4-φ18	SD61-0.5
65-125(I)	35 50 65	9.72 13.9 18.1	22 20 17	67 72.5 70	2900 5.5	3.0	99	400 360 660 140×200	120 100×160 4-φ18	φ185 φ145 65 4-φ18	SD61-0.5

ISG 型泵性能参数表、安装尺寸图及安装尺寸表 Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of ISG Pumps

■ 安装尺寸图 Installation Dimensions Drawing

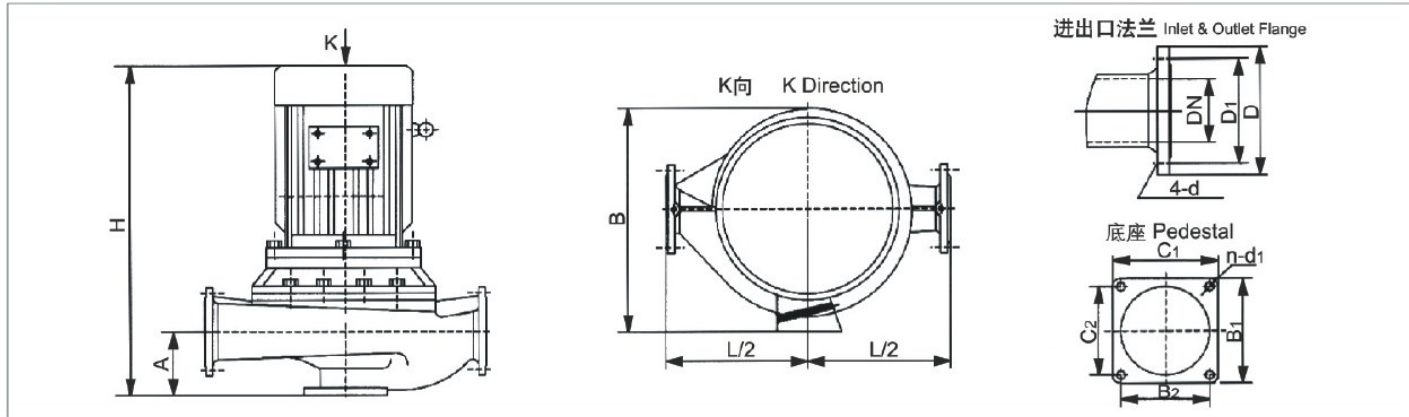


■ 性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow	Head 扬程	Efficiency 效率	r/min 转速	Motor 功率	(NPSH) _r (m) 必需汽蚀余量	Weight (kg) 重量	外形尺寸 Outline Dimensions				安装尺寸 Installation Dimensions			进出口法兰尺寸 Inlet & Outlet Flange Dimensions				隔振器(垫) Vibration isolator
泵型号	m³/h L/S	扬程	效率	转速	电机功率	必需汽蚀余量	重量	L	B	H	C1×B1	A	C2×B2	n-d1	D	D1	DN	4-d	规格Spec
65-125(I)A	31.3 45 58	8.7 12.5 16.1	17.5 16 13.6	66 71 69	2900	4	78	400	315	595	140×200	120	100×160	4-φ18	φ185	φ145	65	4-φ18	SD61-0.5
65-160(I)	35 50 65	9.72 13.9 18.1	35 32 28	63 71 70	2900	7.5	103	400	360	660	140×200	125	100×160	4-φ18	φ185	φ145	65	4-φ18	SD61-0.5
65-160(I)A	32.7 46.7 61	9.1 13.0 16.9	30.6 28 24	62 70 69	2900	7.5	103	400	360	660	140×200	125	100×160	4-φ18	φ185	φ145	65	4-φ18	SD61-0.5
65-160(I)B	30.3 43.3 56.3	8.4 12.0 15.6	26 24 21	69	2900	5.5	97	400	315	660	140×200	125	100×160	4-φ18	φ185	φ145	65	4-φ18	SD61-0.5
65-200(I)	35 50 65	9.72 13.9 18.1	53.5 50 46	55 67 68	2900	15	176	450	430	795	140×200	125	100×160	4-φ18	φ185	φ145	65	4-φ18	JGD2-3
65-200(I)A	32.8 47 61	9.1 13.1 16.9	47 44 40	54 66 67	2900	11	166	450	430	795	140×200	125	100×160	4-φ18	φ185	φ145	65	4-φ18	JGD2-3
65-200(I)B	30.5 43.5 56.6	8.5 12.1 15.7	40.6 38 33.4	65	2900	7.5	114	450	360	655	140×200	125	100×160	4-φ18	φ185	φ145	65	4-φ18	JGD2-3
65-250(I)	35 50 65	9.72 13.9 18.1	83 80 72	52 59 60	2900	22	235	480	465	870	160×220	130	120×180	4-φ18	φ185	φ145	65	4-φ18	JGD2-3
65-250(I)A	32.5 46.7 61	9.0 13.0 16.9	73 70 63	52 59 60	2900	18.5	205	480	430	850	160×220	130	120×180	4-φ18	φ185	φ145	65	4-φ18	JGD2-3
65-250(I)B	30 43.3 56	8.3 12.0 15.6	62 60 54	58	2900	15	180	480	430	800	160×220	130	120×180	4-φ18	φ185	φ145	65	4-φ18	JGD2-3
65-315(I)	35 50 65	9.72 13.9 18.1	128 125 121	44 54 57	2900	37	350	580	530	1000	190×280	130	150×240	4-φ18	φ185	φ145	65	4-φ18	JGD2-3
65-315(I)A	32.5 46.5 60.5	9.0 12.9 16.8	112.6 110 106.4	43 54 57	2900	30	335	580	530	1000	190×280	130	150×240	4-φ18	φ185	φ145	65	4-φ18	JGD2-3
65-315(I)B	31 44.5 58	8.6 12.4 16.1	102.5 100 98	53	2900	30	335	580	530	1000	190×280	130	150×240	4-φ18	φ185	φ145	65	4-φ18	JGD2-3
65-315(I)C	29 41 53.6	8.1 11.4 14.9	87 85 83	51	2900	22	270	580	470	885	190×280	130	150×240	4-φ18	φ185	φ145	65	4-φ18	JGD2-3
80-100	35 50 65	9.72 13.9 18.1	13.8 12.5 10	67 73 70	2900	3	63	400	285	570	140×200	120	100×160	4-φ18	φ200	φ160	80	8-φ18	SD61-0.5
80-100A	31.3 44.7 58	8.7 12.5 16.1	11 10 8	66 72 69	2900	2.2	54	400	245	530	140×200	120	100×160	4-φ18	φ200	φ160	80	8-φ18	SD61-0.5
80-125	35 50 65	9.72 13.9 18.1	22 20 17	67 72.5 70	2900	5.5	99	400	360	645	140×200	120	100×160	4-φ18	φ200	φ160	80	8-φ18	SD61-0.5

ISG 型泵性能参数表、安装尺寸图及安装尺寸表 Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of ISG Pumps

■ 安装尺寸图 Installation Dimensions Drawing

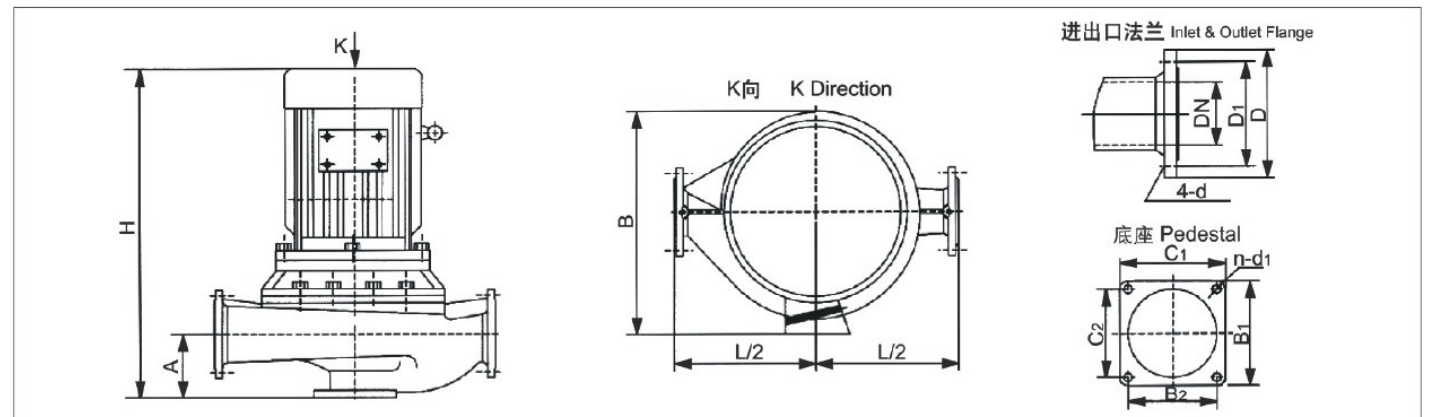


■ 性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow	Head 扬程	Efficiency 效率	r/min 转速	Motor 功率	(NPSH) _r (m) 必需汽蚀余量	Weight (kg) 重量	外形尺寸 Outline Dimensions				安装尺寸 Installation Dimensions			进出口法兰尺寸 Inlet & Outlet Flange Dimensions				隔振器(垫) Vibration isolator
泵型号	m³/h L/S	扬程	效率	转速	电机功率	必需汽蚀余量	重量	L	B	H	C1×B1	A	C2×B2	n-d1	D	D1	DN	4-d	规格Spec
80-125A	31.3 45 58	8.7 12.5 16.1	17.5 16 13.6	66 71 69	2900	4	79	400	315	590	140×200	120	100×160	4-φ18	φ200	φ160	80	8-φ18	SD61-0.5
80-160	35 50 65	9.72 13.9 18.1	35 32 28	63 71 70	2900	7.5	105	400	360	660	140×200	125	100×160	4-φ18	φ200	φ160	80	8-φ18	SD61-0.5
80-160A	32.7 46.7 61	9.1 13.0 16.9	30.6 28 24	62 70 69	2900	7.5	105	400	360	660	140×200	125	100×160	4-φ18	φ200	φ160	80	8-φ18	SD61-0.5
80-160B	30.3 43.3 56.3	8.4 12.0 15.6	26 24 21	69	2900	5.5	98	400	315	660	140×200	125	100×160	4-φ18	φ200	φ160	80	8-φ18	SD61-0.5
80-200	35 50 65	9.72 13.9 18.1	53.5 50 46	55 67 68	2900	15	175	430	430	795	140×200	125	100×160	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-200A	32.8 47 61	9.1 13.1 16.9	47 44 40	54 66 67	2900	11	165	430	430	795	140×200	125	100×160	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-200B	30.5 43.5 56.6	8.5 12.1 15.7	40.6 38 33.4	65	2900	7.5	115	430	360	665	140×200	125	100×160	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-250	35 50 65	9.72 13.9 18.1	83 80 72	52 59 60	2900	22	240	480	465	870	160×220	130	120×180	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-250A	32.5 46.7 61	9.0 13.0 16.9	73 70 63	52 59 60	2900	18.5	210	480	430	850	160×220	130	120×180	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-250B	30 43.3 56	8.3 12.0 15.6	62 60 54	58	2900	15	185	480	430	800	160×220	130	120×180	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-315	35 50 65	9.72 13.9 18.1	128 125 122	43 54 57	2900	37	355	580	530	1000	190×280	130	150×240	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-315A	32.5 46.5 60.5	9.0 12.9 16.8	112.6 110 107.4	43 54 57	2900	30	340	580	530	1000	190×280	130	150×240	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-315B	31 44.5 58	8.6 12.4 16.1	102.5 100 98	53	2900	30	340	580	530	1000	190×280	130	150×240	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-315C	29 41 53.6	8.1 11.4 14.9	87 85 83	51	2900	22	275	580	470	885	190×280	130	150×240	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-350	35 50 65	9.72 13.9 18.1	146 150 142	55 66 67	2900	55	570	630	610	1100	200×260	130	160×220	4-φ18	φ200	φ160	80	8-φ18	JSD-85
80-350A	31 44.5 58	8.6 12.4 16.1	138.4 142 134.8	65	2900	45	470	630	575	1015	200×260	130	160×220	4-φ18	φ200	φ160	80	8-φ18	JSD-85
80-350B	29 41 53.6	8.1 11.4 14.9	131.4 135 127.8	63	2900	37	440	630	545	975	200×260	130	160×220	4-φ18	φ200	φ160	80	8-φ18	JSD-85
80-100(I)	70 100 130	19.4 27.8 36.1	13.6 12.5 11	66 76 75	2900	5.5	108	460	360	675	160×220	140	120×180	4-φ18	φ200	φ160	80	8-φ18	SD61-0.5

ISG 型泵性能参数表、安装尺寸图及安装尺寸表 Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of ISG Pumps

■ 安装尺寸图 Installation Dimensions Drawing

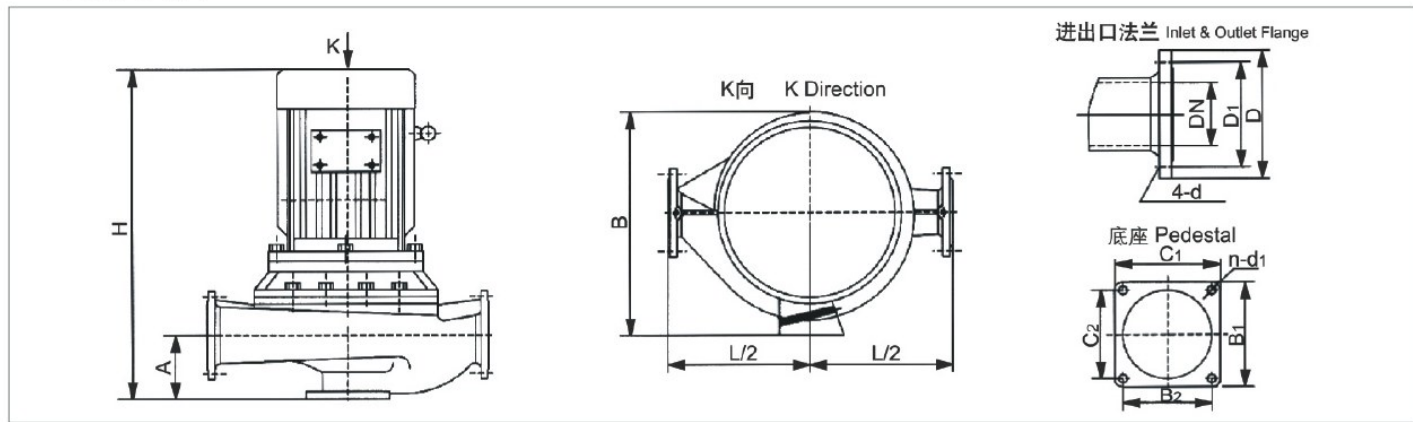


■ 性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow	Head 扬程	Efficiency 效率	r/min speed 转速	Motor Power 电机功率	(NPSH) _r (m) net positive suction head required 必需汽蚀余量	Weight (kg) 重量	外形尺寸 Outline Dimensions				安装尺寸 Installation Dimensions			进出口法兰尺寸 Inlet & Outlet Flange Dimensions				隔振器(垫) Vibration isolator 规格Spec
泵型号	m³/h L/S	扬程	效率	转速	电机功率	必需汽蚀余量	重量	L	B	H	C1×B1	A	C2×B2	n-d1	D	D1	DN	4-d	
80-100(I)A	62.6 89 116	17.4 24.7 32.2	11 10 8.8	2900	4	4.5	87	460	360	620	160×220	140	120×180	4-φ18	φ200	φ160	80	8-φ18	SD61-0.5
80-125(I)	70 100 130	19.4 27.8 36.1	23.5 20 14	2900	11	4.5	163	450	430	805	160×220	140	120×180	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-125(I)A	62.6 89 116	17.4 24.7 32.2	19 16 11	2900	7.5	4.5	113	450	350	675	160×220	140	120×180	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-160(I)	70 100 130	19.4 27.8 36.1	36.5 32 24	2900	15	4.5	184	500	430	835	160×220	160	120×180	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-160(I)A	65.4 93.5 121.6	18.2 26.0 33.8	32 28 21	2900	11	4.5	174	500	430	835	160×220	160	120×180	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-160(I)B	60.6 86.6 112.5	16.8 24.1 31.3	72 24 18	2900	11	4.5	174	500	430	725	160×220	160	120×180	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-200(I)	70 100 130	19.4 27.8 36.1	54 50 42	2900	22	4.0	251	480	475	880	160×220	135	120×180	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-200(I)A	65.4 93.5 121.6	18.2 26.0 33.8	47.5 44 37	2900	18.5	4.0	220	480	430	860	160×220	135	120×180	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-200(I)B	61 87 113	16.9 24.2 31.4	41 38 32	2900	15	4.0	198	480	430	815	160×220	135	120×180	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-250(I)	70 100 130	19.4 27.8 36.1	87 80 68	2900	37	4.0	330	550	520	1015	190×280	155	130×220	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-250(I)A	65.4 93.5 121.6	18.2 26.0 33.8	76 70 59.5	2900	30	4.0	315	550	520	1015	190×280	155	130×220	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-250(I)B	61 87 113	16.9 24.2 31.4	65 60 51	2900	30	4.0	315	550	520	1015	190×280	155	130×220	4-φ18	φ200	φ160	80	8-φ18	JGD2-3
80-315(I)	70 100 130	19.4 27.8 36.1	132 125 114	2900	75	4.0	675	640	700	1235	190×280	165	150×240	4-φ22	φ200	φ160	80	8-φ18	JGD2-3
80-315(I)A	66.5 95 123.6	18.5 26.4 34.3	119 113 103	2900	55	4.0	535	640	640	1165	190×280	165	150×240	4-φ22	φ200	φ160	80	8-φ18	JGD2-3
80-315(I)B	63 90 117	17.5 25 32.5	106.6 101 92	2900	55	4.0	420	640	580	1080	190×280	165	150×240	4-φ22	φ200	φ160	80	8-φ18	JGD2-3
80-315(I)C	58 82 107	16.1 22.8 29.7	90 85 76	2900	37	4.0	366	640	520	1040	190×280	165	150×240	4-φ22	φ200	φ160	80	8-φ18	JGD2-3
100-100	70 100 130	19.4 27.8 36.1	13.6 12.5 11	2900	5.5	4.5	113	460	360	670	160×220	140	120×180	4-φ18	φ220	φ180	100	8-φ18	SD61-0.5

ISG 型泵性能参数表、安装尺寸图及安装尺寸表 Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of ISG Pumps

■ 安装尺寸图 Installation Dimensions Drawing

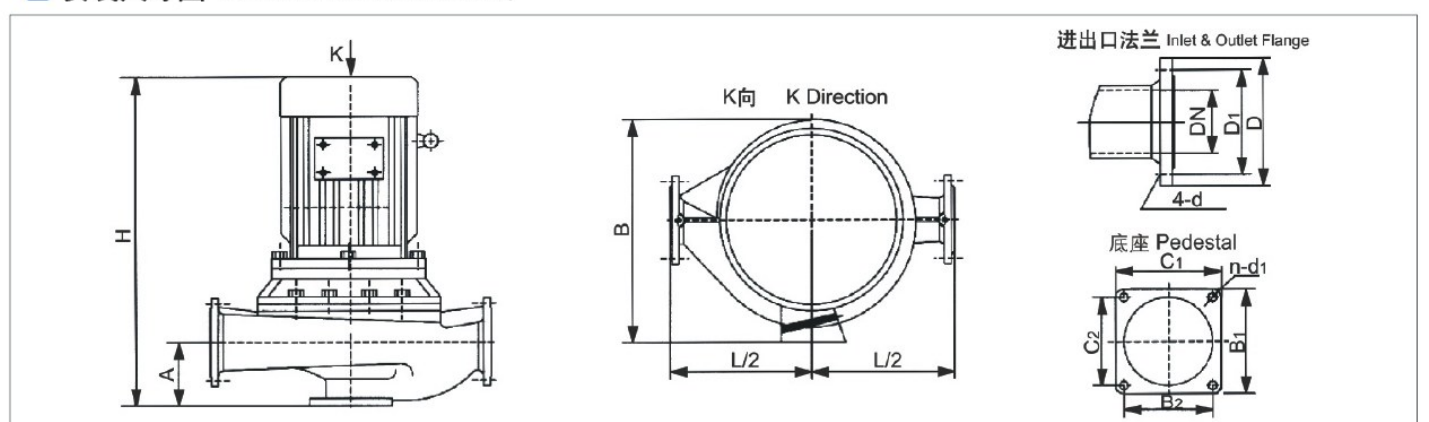


■ 性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow	Head 扬程	Efficiency 效率	r/min speed 转速	Motor Power 电机功率	(NPSH) _r (m) net positive suction head required 必需汽蚀余量	Weight (kg) 重量	外形尺寸 Outline Dimensions				安装尺寸 Installation Dimensions			进出口法兰尺寸 Inlet & Outlet Flange Dimensions				隔振器(垫) Vibration isolator 规格Spec
泵型号	m³/h L/S	扬程	效率	转速	电机功率	必需汽蚀余量	重量	L	B	H	C1×B1	A	C2×B2	n-d1	D	D1	DN	4-d	
100-100A	62.6 89 116	17.4 24.7 32.2	11 10 8.8	2900	4	4.5	91	460	315	610	160×220	140	120×180	4-φ18	φ220	φ180	100	8-φ18	SD61-0.5
100-125	70 100 130	19.4 27.8 36.1	23.5 20 14	2900	11	4.5	169	440	430	805	160×220	140	120×180	4-φ18	φ220	φ180	100	8-φ18	JGD2-3
100-125A	62.6 89 116	17.4 24.7 32.2	19 16 11	2900	7.5	4.5	118	440	350	675	160×220	140	120×180	4-φ18	φ220	φ180	100	8-φ18	JGD2-3
100-160	70 100 130	19.4 27.8 36.1	36.5 32 24	2900	15	4.5	191	500	430	835	160×220	160	120×180	4-φ18	φ220	φ180	100	8-φ18	JGD2-3
100-160A	65.4 93.5 121.6	18.2 26.0 33.8	32 28 21	2900	11	4.5	181	500	430	835	160×220	160	120×180	4-φ18	φ220	φ180	100	8-φ18	JGD2-3
100-160B	60.6 86.6 112.5	16.8 24.1 31.3	72 24 18	2900	11	4.5	181	500	430	835	160×220	160	120×180	4-φ18	φ220	φ180	100	8-φ18	JGD2-3
100-200	70 100 130	19.4 27.8 36.1	54 50 42	2900	22	4.0	245	480	475	880	160×220	140	120×180	4-φ18	φ220	φ180	100	8-φ18	JGD2-3
100-200A	65.4 93.5 121.6	18.2 26.0 33.8	47.5 44 37	2900	18.5	4.0	215	480	430	860	160×220	140	120×180	4-φ18	φ220	φ180	100	8-φ18	JGD2-3
100-200B	61 87 113	16.9 24.2 31.4	41 38 32	2900	15	4.0	193	480	430	815	160×220	140	120×180	4-φ18	φ220	φ180	100	8-φ18	JGD2-3
100-250	70 100 130	19.4 27.8 36.1	87 80 68	2900	37	4.0	345	550	520	1015	160×220	155	120×180	4-φ18	φ220	φ180	100	8-φ18	JGD3-2
100-250A	65.4 93.5 121.6	18.2 26.0 33.8	76 70 59.5	2900	30	4.0	330	550	520	1015	160×220	155	120×180	4-φ18	φ220	φ180	100	8-φ18	JGD3-2
100-250B	61 87 113	16.9 24.2 31.4	65 60 51	2900	30	4.0	330	550	520	1015	160×220	155	120×180	4-φ18	φ220	φ180	100	8-φ18	JGD3-2
100-315	70 100 130	19.4 27.8 36.1	132 125 114	2900	75	4.0	689	630	700	1235	250×300	165	210×260	4-φ22	φ220	φ180	100	8-φ18	JGD3-2
100-315A	66.5 95 123.6	18.5 26.4 34.3	119 113 103	2900	55	4.0	549	630	640	1165	250×300	165	210×260	4-φ22	φ220	φ180	100	8-φ18	JGD3-2
100-315B	63 90 117	17.5 25 32.5	106.6 101 92	2900	45	4.0	439	630	580	1080	250×300	165	210×260	4-φ22	φ220	φ180	100	8-φ18	JGD3-2
100-315C	58 82 107	16.1 22.8 29.7	90 85 76	2900	37	4.0	385	630	520	1040	250×300	165	210×260	4-φ22	φ220	φ180	100	8-φ18	JGD3-2
100-350	60 100 120	16.7 27.8 33.3	153.6 150 142	2900	90	4.0	950	680	630	1310	230×320	175	180×270	4-φ22	φ220	φ180	100	8-φ18	JSD-150
100-350A	61 87 113	16.9 24.2 31.4	145.6 142 134	2900	75	4.0	830	680	630	1260	230×320	175	180×270	4-φ22	φ220	φ180	100	8-φ18	JSD-150

ISG 型泵性能参数表、安装尺寸图及安装尺寸表 Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of ISG Pumps

■ 安装尺寸图 Installation Dimensions Drawing

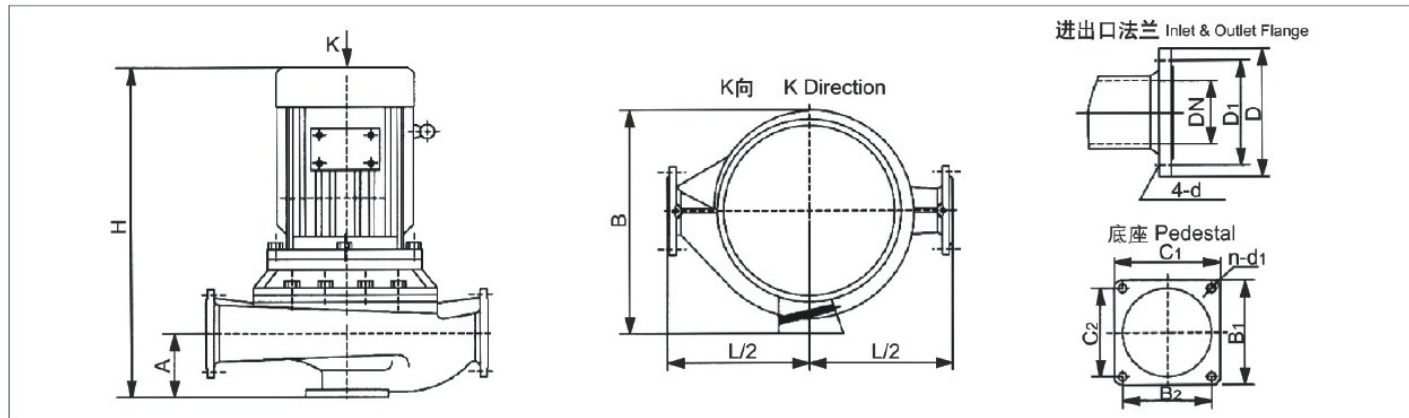


■ 性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow		Head (m)	Efficiency %	r/min speed	Motor Power kW	(NPSH) _r (m) net positive suction head required	Weight (kg)	外形尺寸 Outline Dimensions				安装尺寸 Installation Dimensions			进出口法兰尺寸 Inlet & Outlet Flange Dimensions				隔振器(垫) Vibration Isolator
泵型号	m³/h	L/S	扬程	效率	转速	电机功率	必需汽蚀余量	重量	L	B	H	C1×B1	A	C2×B2	n-d1	D	D1	DN	4-d	规格Spec
100-350B	58 82 107	16.1 22.8 29.7	138.6 135 127	75	2900	55	4.0	600	680	605	1190	230×320	175	180×270	4-φ22	φ220	φ180	100	8-φ18	JSD-150
100-100(I)	96 160 192	26.7 44.4 53.3	14 12.5 10	64 73 70	2900	11	4.5	115	500	415	800	160×220	140	120×180	4-φ18	φ220	φ180	100	8-φ18	SD61-0.5
100-125(I)	96 160 192	26.7 44.4 53.3	24 20 14	62 74 69	2900	15	4.5	168	500	300	807	160×220	160	120×180	4-φ18	φ220	φ180	100	8-φ18	SD61-0.5
100-125(I)A	84 140 168	23.3 39 46.7	20 17 12	64 72 68	2900	11	4.5	168	500	280	807	160×220	160	120×180	4-φ18	φ220	φ180	100	8-φ18	SD61-0.5
100-160(I)	96 160 192	26.7 44.4 53.3	36 32 27	69 79 75	2900	22	5.6	210	500	330	884	160×220	170	120×180	4-φ18	φ220	φ180	100	8-φ18	SD61-0.5
100-160(I)A	84 140 168	23.3 39 46.7	32 28 23.5	66 76 72	2900	18.5	5.0	210	500	330	884	160×220	170	120×180	4-φ18	φ220	φ180	100	8-φ18	SD61-0.5
100-200(I)	96 160 192	26.7 44.4 53.3	53 50 45	69 79 78	2900	37	5.2	402	540	365	970	160×220	165	120×180	4-φ18	φ220	φ180	100	8-φ18	SD61-0.5
100-200(I)A	84 140 168	23.3 39 46.7	48 45 40	64 74 73	2900	30	4.5	395	540	345	970	160×220	165	120×180	4-φ18	φ220	φ180	100	8-φ18	SD61-0.5
100-200(I)B	60 100 120	16.7 27.8 33.3	43 40 36	72	2900	22	4.5	360	540	345	970	160×220	165	120×180	4-φ18	φ220	φ180	100	8-φ18	SD61-0.5
100-250(I)	96 160 192	26.7 44.4 53.3	83 80 72	65 77 74	2900	55	4.8	560	600	435	1120	190×280	175	150×240	4-φ18	φ220	φ180	100	8-φ18	JGD2-3
100-250(I)A	84 140 168	23.3 39 46.7	75 72 65	60 72 69	2900	45	4.5	420	600	360	1120	190×280	175	150×240	4-φ18	φ220	φ180	100	8-φ18	JGD2-3
100-250(I)B	60 100 120	16.7 27.8 33.3	68 65 58	70	2900	37	4.5	400	600	360	1120	190×280	175	150×240	4-φ18	φ220	φ180	100	8-φ18	JGD2-3
125-100	96 160 192	26.7 44.4 53.3	13 12.5 12	82	2900	11	4.0	180	520	430	830	160×220	165	120×180	4-φ18	φ250	φ210	125	8-φ18	JGD2-3
125-100A	86 143 172	23.9 39.7 47.8	10.4 10 9.6	77	2900	7.5	4.0	125	520	360	730	160×220	165	120×180	4-φ18	φ250	φ210	125	8-φ18	JGD2-3
125-125	96 160 192	26.7 44.4 53.3	22.6 20 17	80	2900	15	4.0	220	520	430	840	160×220	170	120×180	4-φ18	φ250	φ210	125	8-φ18	JGD2-3
125-125A	86 143 172	23.9 39.7 47.8	18 16 13.6	77	2900	11	4.0	210	520	430	840	160×220	170	120×180	4-φ18	φ250	φ210	125	8-φ18	JGD2-3
125-160	96 160 192	26.7 44.4 53.3	36 32 28	78	2900	22	4.0	265	520	460	920	190×280	175	150×240	4-φ18	φ250	φ210	125	8-φ18	JGD2-3

ISG 型泵性能参数表、安装尺寸图及安装尺寸表 Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of ISG Pumps

■ 安装尺寸图 Installation Dimensions Drawing

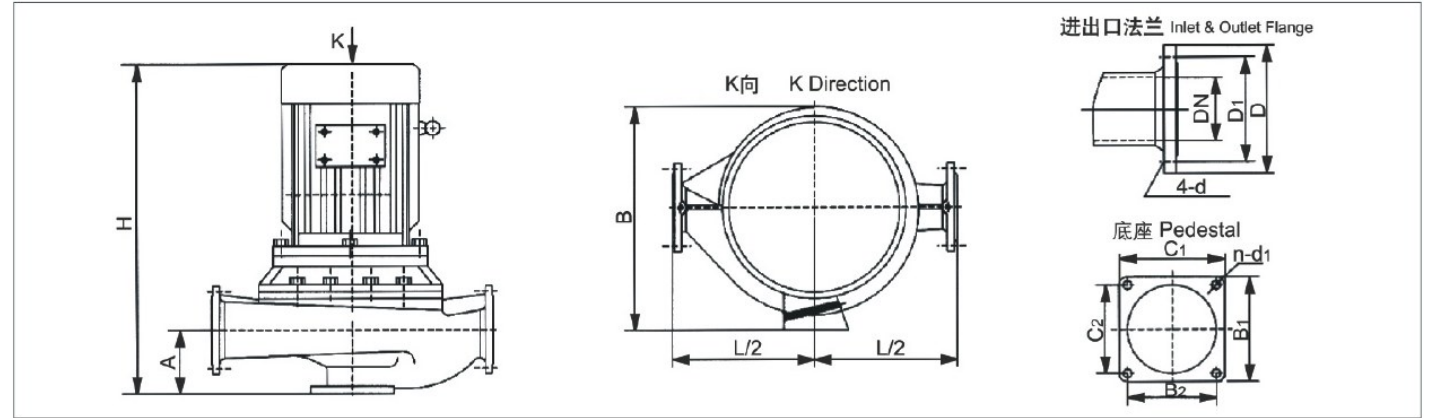


■ 性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow		Head (m)	Efficiency %	r/min speed	Motor Power kW	(NPSH) _r (m) net positive suction head required	Weight (kg)	外形尺寸 Outline Dimensions				安装尺寸 Installation Dimensions			进出口法兰尺寸 Inlet & Outlet Flange Dimensions				隔振器(垫) Vibration isolator
泵型号	m³/h	L/S	扬程	效率	转速	电机功率	必需汽蚀余量	重量	L	B	H	C1×B1	A	C2×B2	n-d1	D	D1	DN	4-d	规格Spec
125-160A	90 150 180	25 41.7 50	31.5 28 24.5	76	2900	18.5	4.0	230	520	430	890	190×280	175	150×240	4-φ18	φ250	φ210	125	8-φ18	JGD2-3
125-160B	83 138 166	21.7 38.3 46.1	27 24 21	73	2900	15	4.0	215	520	430	850	190×280	175	150×240	4-φ18	φ250	φ210	125	8-φ18	JGD2-3
125-200	96 160 192	26.7 44.4 53.3	55 50 46	77	2900	37	5.5	395	560	510	1040	250×300	170	200×250	4-φ22	φ250	φ210	125	8-φ18	JGD3-2
125-200A	90 150 180	25 41.7 50	48.4 44 40.5	76	2900	30	5.5	380	560	510	1040	250×300	170	200×250	4-φ22	φ250	φ210	125	8-φ18	JGD3-2
125-200B	83 138 166	21.7 38.3 46.1	41.3 37.5 34.5	75	2900	22	5.5	320	560	460	930	250×300	170	200×250	4-φ22	φ250	φ210	125	8-φ18	JGD3-2
125-250	96 160 192	26.7 44.4 53.3	87 80 73	75	2900	55	5.0	580	680	660	1180	250×300	170	200×250	4-φ22	φ250	φ210	125	8-φ18	JGD3-2
125-250A	90 150 180	25 41.7 50	76 70 84	74	2900	45	5.5	490	680	570	1080	250×300	170	200×250	4-φ22	φ250	φ210	125	8-φ18	JGD3-2
125-250B	83 138 166	21.7 38.3 46.1	65 60 55	73	2900	37	5.5	430	680	510	1050	250×300	170	200×250	4-φ22	φ250	φ210	125	8-φ18	JGD3-2
125-315	96 160 192	26.7 44.7 53.3	133 125 119	70	2900	90	5.0	790	680	685	1350	290×340	180	230×280	4-φ22	φ250	φ210	125	8-φ18	JGD3-2
125-315A	90 150 180	25 41.7 50	117 110 104.6	70	2900	75	5.0	710	680	685	1300	290×340	180	230×280	4-φ22	φ250	φ210	125	8-φ18	JGD3-3
125-315B	86 143 172	23.9 39.7 47.8	106.4 100 95.2	69	2900	75	5.0	705	680	685	1300	290×340	180	230×280	4-φ22	φ250	φ210	125	8-φ18	JGD3-3
125-315C	80.5 134 161	22.4 37.2 44.7	96 88 86	67	2900	55	5.0	585	680	660	1230	290×340	180	230×280	4-φ22	φ250	φ210	125	8-φ18	JGD3-3
150-125	96 160 192	26.7 44.4 53.3	22.6 20 17	66 76 76	2900	11	4.0	210	520	430	840	160×220	170	120×180	4-φ18	φ285	φ240	150	8-φ22	JGD2-3
150-125A	90 150 180	25 41.7 50	18 16 13.6	77	2900	7.5	4.0	130	520	430	840	160×220	170	120×180	4-φ18	φ285	φ240	150	8-φ22	JGD2-3
150-160	96 160 192	26.7 44.4 53.3	36 32 27	75	2900	22	4.0	270	520	430	850	190×280	175	150×240	4-φ18	φ285	φ240	150	8-φ22	JGD2-3
150-160A	90 150 180	25 41.7 50	32 28 23.5	76	2900	18.5	4.0	230	520	430	850	190×280	175	150×240	4-φ18	φ285	φ240	150	8-φ22	JGD2-3
150-160B	84 140 168	23.3 39 46.7	27 24 21	73	2900	15	4.0	220	520	430	850	190×280	175	150×240	4-φ18	φ285	φ240	150	8-φ22	JGD2-3

ISG 型泵性能参数表、安装尺寸图及安装尺寸表 Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of ISG Pumps

■ 安装尺寸图 Installation Dimensions Drawing

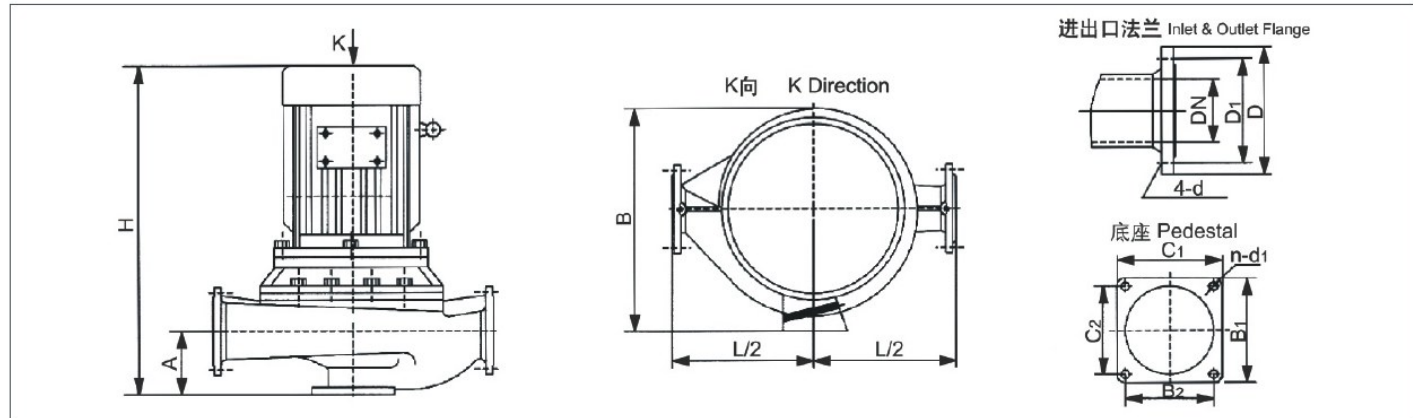


■ 性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow	Head (m)	Efficiency %	r/min speed	Motor Power kW	(NPSH) _r (m) net positive suction head required	Weight (kg)	外形尺寸 Outline Dimensions	安装尺寸 Installation Dimensions	进出口法兰尺寸 Inlet & Outlet Flange Dimensions	隔振器(垫) Vibration isolator
泵型号	m³/h L/S	扬程	效率	转速	电机功率	必需汽蚀余量	重量	L B H C1×B1	A C2×B2 n-d1	D D1 DN 4-d	规格Spec
150-200	140 200 260	38.9 55.6 72.2	13.8 12.5 10.6	68 78 78	1450	15	3.0	265 680 435 930 250×300	200 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD2-3
150-200A	125 176 232.5	34.7 49.7 64.6	11 10 8.5	66 76 76	1450	11	3.0	244 680 435 885 250×300	200 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD2-3
150-200B	84 140 168	23.3 39 46	41 38 34	75	2900	22	3.0	275 680 435 885 250×300	200 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD2-3
150-250	140 200 260	38.9 55.6 72.2	21.8 20 17	73 79 77	1450	18.5	3.0	300 700 475 960 250×300	205 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD2-3
150-250A	129 184.4 240	35.8 51.2 66.7	18.5 17 14.4	72 78 76	1450	15	3.0	262 700 475 940 250×300	205 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD2-3
150-250B	117 167 217.5	32.5 46.4 60.4	15.2 14 12	76	1450	11	3.0	241 700 445 895 250×300	205 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD2-3
150-315	140 200 260	38.9 55.6 72.2	33.8 32 28	70 78 73	1450	30	2.5	410 760 530 1075 250×300	205 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD3-3
150-315A	131 187 243	36.4 51.9 67.5	29.5 28 24.5	69 77 77	1450	22	3.5	335 760 505 1000 250×300	205 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD3-3
150-315B	121 173 225	33.5 48.1 62.5	25 24 21	76	1450	18.5	3.5	315 760 505 960 250×300	205 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD3-3
150-350	96 160 192	26.7 44.4 53.3	153.6 150 142.8	80	2900	110	5.5	970 760 530 1075 250×300	205 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD3-3
150-350A	90 150 180	25 41.7 50	145.6 142 134.8	70	2900	110	5.2	790 760 530 1075 250×300	205 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD3-3
150-350B	84 140 168	23.3 39 46.7	138.6 135 127.8	65 76 74	2900	90	5.5	705 760 530 1075 250×300	205 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD3-3
150-400	140 200 260	38.9 55.6 72.2	53 50 44	68 75 71	1450	45	3.5	490 800 595 1100 250×300	210 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD3-3
150-400A	131 187 243	36.4 51.9 67.5	46.6 44 38.3	67 74 70	1450	37	3.5	454 800 595 1075 250×300	210 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD3-3
150-400B	122 174 226.5	33.9 48.3 62.9	40 38 33	73	1450	30	3.5	435 800 560 1060 250×300	210 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD3-3
150-400C	112 160 208	31.1 44.4 57.8	34 32 28	71	1450	22	3.5	365 800 535 995 250×300	210 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD3-3
150-250(I)	120 200 240	33.3 55.6 66.7	87 80 72	65 76 74	2900	75	4.5	702 700 700 1280 250×300	195 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD3-3
150-250(I)A	112 187 224	31.1 51.9 62.2	76 70 63	64 75 73	2900	55	4.5	561 700 640 1200 250×300	195 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD3-3

ISG 型泵性能参数表、安装尺寸图及安装尺寸表 Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of ISG Pumps

■ 安装尺寸图 Installation Dimensions Drawing

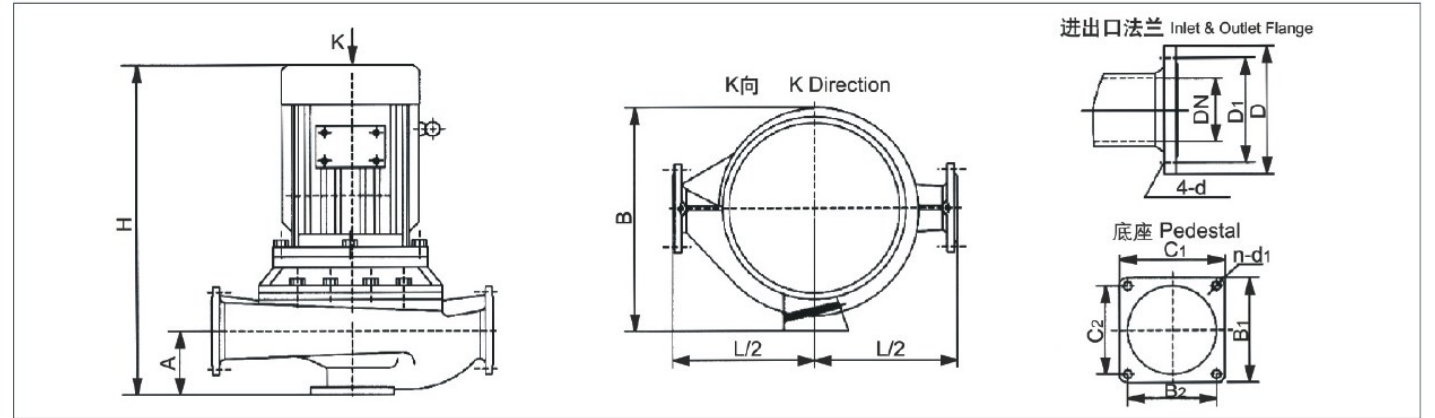


■ 性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow	Head (m)	Efficiency %	r/min speed	Motor Power kW	(NPSH) _r (m) net positive suction head required	Weight (kg)	外形尺寸 Outline Dimensions	安装尺寸 Installation Dimensions	进出口法兰尺寸 Inlet & Outlet Flange Dimensions	隔振器(垫) Vibration isolator
泵型号	m³/h L/S	扬程	效率	转速	电机功率	必需汽蚀余量	重量	L B H C1×B1	A C2×B2 n-d1	D D1 DN 4-d	规格Spec
150-250(I)B	104 173 208	28.9 48.1 57.8	65 60 54	63 74 72	2900	45	4.5	460 700 585 1115 250×300	195 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD3-3
150-315(I)	120 200 240	33.3 55.6 66.7	133 125 120	58 73 75	2900	110	4.5	980 760 900 1560 250×300	200 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD3-3
150-315(I)A	112 187 224	31.1 51.9 62.2	116 110 105	57 72 74	2900	90	4.5	800 760 700 1330 250×300	200 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD3-3
150-315(I)B	104 173 208	28.9 48.1 57.8	100 95 91	55 70 72	2900	75	4.5	724 760 700 1210 250×300	200 210×260 4-φ22	φ285 φ240 150 8-φ22	JGD3-3
200-200	140 200 260	38.9 55.6 72.2	13.8 12.5 10.6	68 78 78	1450	15	3.0	265 680 435 930 300×370	200 250×320 4-φ22	φ340 φ295 200 12-φ22	JGD2-3
200-200A	125 179 232.5	34.7 49.7 64.6	11 10 8.5	66 76 76	1450	11	3.0	244 680 435 885 300×370	200 250×320 4-φ22	φ340 φ295 200 12-φ22	JGD2-3
200-250	140 200 260	38.9 55.6 72.2	21.8 20 17	73 79 77	1450	18.5	3.0	305 750 475 960 300×370	210 250×320 4-φ22	φ340 φ295 200 12-φ22	JGD2-3
200-250A	129 184.4 240	35.8 51.2 66.7	18.5 17 14.4	72 78 76	1450	15	3.0	267 750 475 940 300×370	210 250×320 4-φ22	φ340 φ295 200 12-φ22	JGD2-3
200-250B	117 167 217.5	32.5 46.4 60.4	15.2 14 12	76	1450	11	3.0	246 750 445 895 300×370	210 250×320 4-φ22	φ340 φ295 200 12-φ22	JGD2-3
200-315	140 200 260	38.9 55.6 72.2	33.8 32 28	70 78 78	1450	30	3.5	417 800 530 1075 270×320	210 210×260 4-φ22	φ340 φ295 200 12-φ22	JGD3-3
200-315A	131 189 243	36.4 51.9 67.5	29.5 28 24.5	69 77 77	1450	22	3.5	342 800 505 1000 270×320	210 210×260 4-φ22	φ340 φ295 200 12-φ22	JGD3-3
200-315B	121 173 225	33.6 48.1 62.5	25 24 21	76	1450	18.5	3.5	322 800 505 960 270×320	210 210×260 4-φ22	φ340 φ295 200 12-φ22	JGD3-3
200-400	140 200 260	38.9 55.6 72.2	53 50 44	68 75 71	1450	45	3.5	498 860 595 1120 300×370	225 250×320 4-φ22	φ340 φ295 200 12-φ22	JGD3-3
200-400A	131 187 243	36.4 51.9 67.5	46.6 44 38.3	67 74 70	1450	37	3.5	462 860 595 1095 300×370	225 250×320 4-φ22	φ340 φ295 200 12-φ22	JGD3-3
200-400B	122 174 226.5	33.9 48.3 62.9	40 38 33	73	1450	30	3.5	443 860 560 1075 300×370	225 250×320 4-φ22	φ340 φ295 200 12-φ22	JGD3-3
200-400C	112 160 208	31.3 44.4 57.8	34 32 28	71	1450	22	3.5	373 860 535 1000 300×370	225 250×320 4-φ22	φ340 φ295 200 12-φ22	JGD3-3
200-200(I)	280 400 520	77.8 111.1 144	13.4 12.5 10.5	70 80 79	1450	22	4.0	382 810 525 1030 300×370	240 250×320 4-φ22	φ340 φ295 200 12-φ22	JGD3-2

ISG 型泵性能参数表、安装尺寸图及安装尺寸表 Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of ISG Pumps

■ 安装尺寸图 Installation Dimensions Drawing

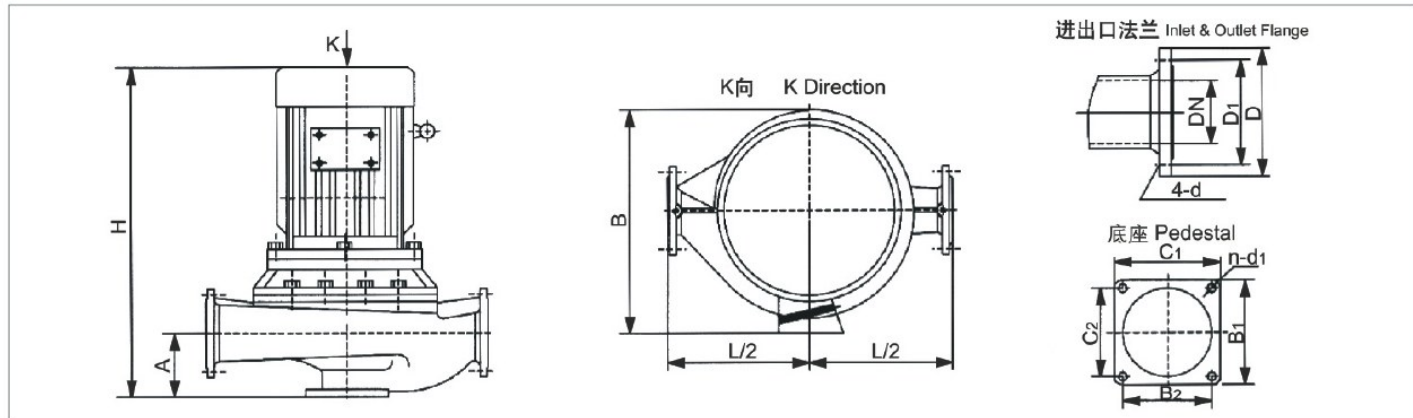


■ 性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow		Head 扬程	Efficiency 效率	r/min speed 转速	Motor Power 电机功率	(NPSH) _r (m) 必需汽蚀余量	Weight (kg) 重量	外形尺寸 Outline Dimensions				安装尺寸 Installation Dimensions			进出口法兰尺寸 Inlet & Outlet Flange Dimensions				隔振器(垫) Vibration isolator 规格Spec
泵型号	m³/h	L/S	扬程	效率	转速	电机功率	必需汽蚀余量	重量	L	B	H	C1×B1	A	C2×B2	n-d1	D	D1	DN	4-d	规格Spec
200-200(I)A	250 358 465	69.4 99.4 129.2	10.7 10 8.5	68 78 77	1450	18.5	4.0	346	810	525	970	300×370	240	250×320	4-φ22	φ340	φ295	200	12-φ22	JGD3-2
200-250(I)	280 400 520	77.8 111.4 144	22.2 20 14	75 80 72	1450	30	4.0	475	830	530	1110	300×370	240	250×320	4-φ22	φ340	φ295	200	12-φ22	JGD3-3
200-250(I)A	250 358 465	69.4 99.6 129.2	18 14 11.2	73 78 70	1450	22	4.0	405	830	510	1035	300×370	240	250×320	4-φ22	φ340	φ295	200	12-φ22	JGD3-3
200-250(I)B	226 322 419	62.8 89.4 116.4	14.4 13 7.3	70 75 67	1450	18.5	4.0	387	830	510	995	300×370	240	250×320	4-φ22	φ340	φ295	200	12-φ22	JGD3-3
200-315(I)	280 400 520	77.8 111.4 144	36 32 26	73 80 75	1450	55	4.0	675	860	645	1265	300×370	250	250×320	4-φ22	φ340	φ295	200	12-φ22	JGD4-1
200-315(I)A	262 374 486	72.8 103.9 135	31.5 28 23	72 79 74	1450	45	4.0	560	860	605	1180	300×370	250	250×320	4-φ22	φ340	φ295	200	12-φ22	JGD4-1
200-315(I)B	242 346 450	67.2 96.1 125	27 24 19.5	78 80 77	1450	37	4.0	535	860	605	1145	300×370	250	250×320	4-φ22	φ340	φ295	200	12-φ22	JGD4-1
200-400(I)	280 400 520	77.8 111.4 144	54.5 50 39	75 81 77	1450	90	4.0	830	880	700	1340	300×370	260	250×320	4-φ22	φ340	φ295	200	12-φ22	JGD4-2
200-400(I)A	262 374 486	72.8 103.9 135	48 44 34	78 80 77	1450	75	4.0	830	880	700	1340	300×370	260	250×320	4-φ22	φ340	φ295	200	12-φ22	JGD4-2
200-400(I)B	242 346 450	67.2 96.1 125	41.4 38 29.6	78 80 77	1450	55	5.0	685	880	735	1270	300×370	260	250×320	4-φ22	φ340	φ295	200	12-φ22	JGD4-2
200-400(I)C	224 320 416	62.2 88.9 115.6	34.9 32 25	76 80 77	1450	45	5.0	580	880	600	1185	300×370	260	250×320	4-φ22	φ340	φ295	200	12-φ22	JGD4-2
250-250	350 550 650	97.2 152.8 180.5	22 20 16	78 82 81	1450	45	5.0	620	1110	550	1145	350×400	250	280×340	4-φ26	φ405	φ355	250	12-φ26	JGD4-2
250-250A	300 500 600	83.3 139 166.7	18.3 17 14	76 80 80	1450	37	5.0	550	1110	550	1145	350×400	250	280×340	4-φ26	φ405	φ355	250	12-φ26	JGD4-2
250-235	300 500 600	83.3 139 166.7	14 12.5 11	73 78 70	1480	22	4.5	410	1110	550	1145	350×400	250	280×340	4-φ26	φ405	φ355	250	12-φ26	JGD4-2
250-300	300 500 600	83.3 139 166.7	22 20 16	78 80 77	1480	37	4.5	550	1110	550	1145	350×400	250	280×340	4-φ26	φ405	φ355	250	12-φ26	JGD4-2
250-315	350 550 650	97.2 152.8 180.5	34 32 28	76 80 79	1450	75	5.5	890	1110	640	1350	350×400	265	280×340	4-φ26	φ405	φ355	250	12-φ26	JGD4-2
250-315A	300 500 600	83.3 139 166.7	29.5 28 24	74 78 77	1450	55	5.5	690	1110	640	1350	350×400	265	280×340	4-φ26	φ405	φ355	250	12-φ26	JGD4-2
250-315B	260 450 520	72.2 125 144.4	25 24 20	70 74 72	1450	45	5.5	620	1110	640	1350	350×400	265	280×340	4-φ26	φ405	φ355	250	12-φ26	JGD4-2
250-400	300 500 600	83.3 139 166.7	54.5 50 39	72 80 77	1480	90	4.5	1600	1200	900	1740	400×500	265	330×420	4-φ26	φ405	φ355	250	12-φ26	JGD4-2

ISG 型泵性能参数表、安装尺寸图及安装尺寸表 Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of ISG Pumps

■ 安装尺寸图 Installation Dimensions Drawing

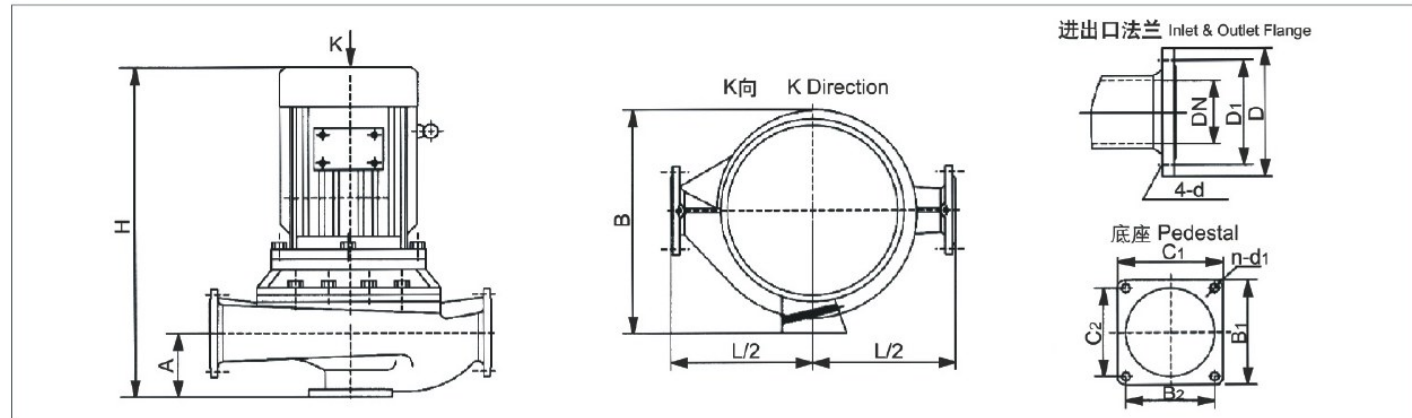


■ 性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow		Head (m)	Efficiency %	r/min speed	Motor Power 电机功率	(NPSH) _r (m) not positive suction head required 必需汽蚀余量	Weight (kg) 重量	外形尺寸 Outline Dimensions				安装尺寸 Installation Dimensions			进出口法兰尺寸 Inlet & Outlet Flange Dimensions				隔振器(垫) Vibration isolator
泵型号	m³/h	L/S	扬程	效率	转速				L	B	H	C1×B1	A	C2×B2	n-d1	D	D1	DN	4-d	规格Spec
250-400A	262 450 521	72.7 125 144.7	46.6 44 38.3	69	1480	90	4.5	1530	1200	900	1740	400×500	265	330×420	4-φ26	φ405	φ355	250	12-φ26	JGD4-2
250-500	385 550 660	106.9 152.8 183.3	87 80 68	80	1480	160	5.5	1750	1250	906	1740	480×530	320	400×500	4-φ26	φ405	φ355	250	12-φ26	JGD4-2
250-500A	357 510 612	99.2 141.7 170	76.1 70 59.5	78	1480	132	5.5	1700	1250	906	1740	480×530	320	400×500	4-φ26	φ405	φ355	250	12-φ26	JGD4-2
250-500B	329 470 564	91.4 130.6 156.7	65.2 60 51	75	1480	110	5.5	1600	1250	906	1670	480×530	320	400×500	4-φ26	φ405	φ355	250	12-φ26	JGD4-2
300-235	540 720 900	150 200 250	20.5 18 15.0	77 81 74	1450	55	5.0	1075	1250	710	1520	400×500	370	330×420	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-235A	450 600 720	125 166 200	17.2 15 12.5	74 79 77	1450	45	5.0	970	1250	710	1470	400×500	370	330×420	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-235B	420 540 650	116.7 150 181	14.3 12.5 10.5	73 78 70	1450	37	5.0	925	1250	685	1400	400×500	370	330×420	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-250	540 720 900	150 200 250	22.5 20 17	80 83 84	1450	55	6.0	1085	1200	620	1315	400×500	300	330×420	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-250A	450 600 720	136 166 200	19.5 17 14	81	1450	45	6.0	980	1200	580	1230	400×500	300	330×420	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-300	540 720 900	150 200 250	32 28 23	82	1480	75	5.0	1230	1350	900	1740	400×500	360	330×420	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-300A	450 600 720	125 166 200	27.5 24 20	80	1480	75	5.0	1095	1350	900	1740	400×500	360	330×420	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-300B	420 540 650	116.7 150 181	24 21 17	78	1480	55	5.0	980	1350	735	1410	400×500	360	330×420	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-315	540 720 900	150 200 250	35 32 26	84	1480	90	4.5	1350	1250	650	1400	400×500	300	330×420	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-315A	460 650 800	127.8 180 222	31.5 28 23.5	80	1480	75	4.5	1240	1250	650	1360	400×500	300	330×420	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-315B	420 580 700	116.7 161 194	27 24 20.0	78	1480	55	4.5	1100	1250	625	1290	400×500	300	330×420	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-380	480 720 900	133.3 200 250	48 44 34	84	970	132	5.0	1900	1370	945	1850	480×550	390	400×450	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-380A	444 666 833	123.3 185 231.4	41.4 38 30	80	970	110	5.0	1700	1370	945	1850	480×550	390	400×450	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-380B	400 614 764	113.6 170.6 213.1	35 32 35	78	970	90	5.0	1530	1370	945	1850	480×550	390	400×450	4-φ26	φ460	φ410	300	12-φ26	JGD4-2

ISG 型泵性能参数表、安装尺寸图及安装尺寸表 Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of ISG Pumps

■ 安装尺寸图 Installation Dimensions Drawing

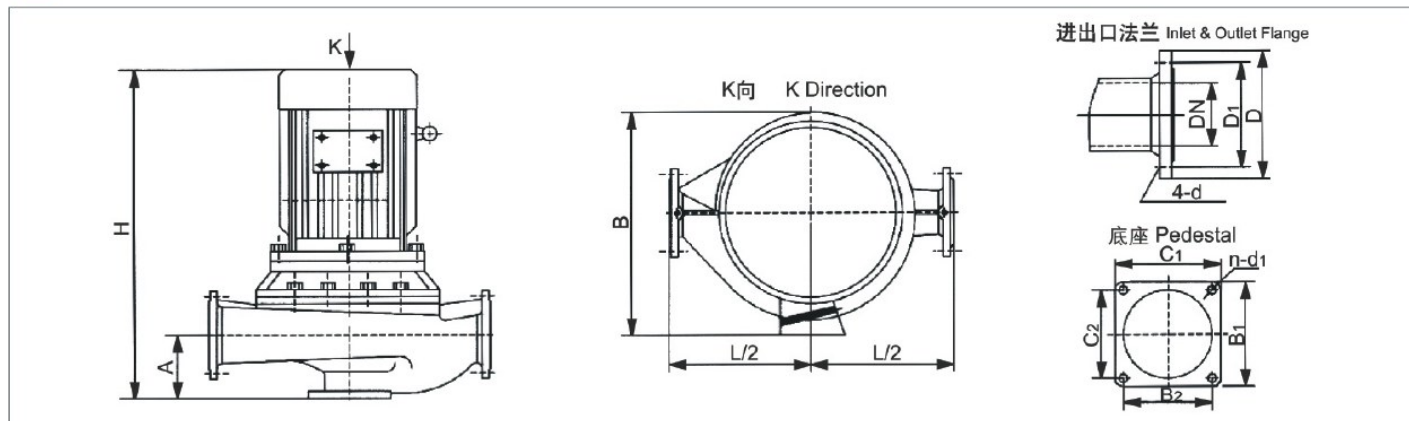

■ 性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow		Head (m)	Efficiency %	r/min speed	Motor Power kW	(NPSH) _r (m) not positive suction head required	Weight (kg)	外形尺寸 Outline Dimensions				安装尺寸 Installation Dimensions			进出口法兰尺寸 Inlet & Outlet Flange Dimensions				隔振器(垫) Vibration Isolator 规格Spec
泵型号	m³/h	L/S	扬程	效率	转速	电动机功率	必需汽蚀余量	重量	L	B	H	C1×B1	A	C2×B2	n-d1	D	D1	DN	4-d	
300-390	540 720 900	150 200 250	20.5 18 15.5	78 81 76	980	55	5.0	1300	1250	630	1300	480×550	370	400×450	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-390A	450 600 720	126 167 200	17.2 15 12.8	77 79 75	980	45	5.0	1220	1250	630	1210	480×550	370	400×450	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-390B	400 540 650	111 150 180	14 12.5 11.5	74 77 76	980	37	5.0	1100	1250	630	1170	480×550	370	400×450	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-400	450 600 720	125 166 200	15 12.5 10.5	78 81 76	1480	110	5.0	1500	1200	650	1570	480×550	300	400×450	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-480	540 720 900	150 200 250	15 12.5 10.5	79 81 80	980	75	5.0	1500	1350	685	1350	480×550	350	400×450	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-480A	450 600 720	126 166 200	17.2 15 12.8	77 79 75	980	75	5.0	1280	1350	685	1300	480×550	350	400×450	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-480B	400 540 650	111 150 180	14 12.5 11.5	74 77 76	980	55	5.0	1180	1350	685	1210	480×550	350	400×450	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-315(I)	650 950 1200	180.6 263.9 333.3	18.6 16 13.5	82 83 82	1450	132	5.5	1680	1370	900	1830	480×550	370	400×450	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
300-315(I)A	600 900 1150	166.7 250 320	16.7 14 11.5	82 83 82	1450	110	5.5	1440	1370	900	1830	480×550	370	400×450	4-φ26	φ460	φ410	300	12-φ26	JGD4-2
350-235	600 800 960	167 222 267	14 12.5 10.5	80 83 82	980	37	4.5	1050	1300	680	1200	480×550	360	400×450	4-φ26	φ520	φ470	350	16-φ26	JGD4-2
350-235(I)	800 1080 1350	222.2 300 375	20 16 12	80 83 82	980	75	4.5	1570	1350	710	1500	480×550	680	400×450	4-φ26	φ520	φ470	350	16-φ26	JGD4-2
350-300	600 800 960	167 222 267	14 12.5 10.5	80 83 82	980	75	4.5	1230	1300	680	1300	480×550	360	400×450	4-φ26	φ520	φ470	350	16-φ26	JGD4-2
350-315	600 800 960	167 222 267	14 12.5 10.5	80 83 82	980	90	4.5	1650	1300	680	1400	480×550	360	400×450	4-φ26	φ520	φ470	350	16-φ26	JGD4-2
350-400	600 800 960	167 222 267	14 12.5 10.5	80 83 82	980	160	4.5	1950	1300	680	1820	480×550	360	400×450	4-φ26	φ520	φ470	350	16-φ26	JGD4-2
400-300	920 1180 1300	255 328 361	23 19 16	78	980	90	6.0	1570	1350	710	1500	480×550	380	400×450	4-φ26	φ580	φ525	400	16-φ29	JGD4-2
400-315	950 1250 1500	264 347 416	24 28 24	76	980	132	6.0	1880	1350	710	1750	480×550	380	400×450	4-φ26	φ580	φ525	400	16-φ29	JGD4-2
500-235	1500 1800 2000	416 500 556	16 14 12	75	980	110	6.0	1750	1400	750	1700	480×550	420	400×450	4-φ26	φ715	φ650	500	20-φ32	JGD4-2
500-300	1400 1700 1900	388 472 528	22 20 18	80	980	132	6.0	1800	1450	750	1700	480×550	420	400×450	4-φ26	φ715	φ650	500	20-φ32	JGD4-2
500-315	1200 1550 1800	333 416 500	32 28 24	78	980	160	6.0	2070	1450	750	1960	480×550	720	400×450	4-φ26	φ715	φ650	500	20-φ32	JGD4-2

成功案例

上海上诚泵阀自创办以来,一直专注于产品创新与开发,为了提高产品的档次,完善产品的售后服务,我们时刻与客户保持紧密的联系。我们本着诚信经营的原则,积极进取,勇于开拓,经过多年的努力拼搏。使上诚水泵的产品深受石油、化工、电力、造纸、环保、冶金、煤矿、食品、制药、给排水工程用户的一致好评。

北京汇源食品饮料食品集团	大连宜家家具	丝宝集团	福建闽东电力公司
复旦大学附属中山医院	金红叶纸业集团有限公司	上海交通大学	三井住友银行
玖龙纸业(太仓)有限公司	内蒙古霍煤鸿骏铝公司	巨化集团公司制药厂	上海隧道工程股份有限公司
上海南汇自来水厂	上海理工大学	中粮粮油工业(巢湖)	中国石化集团上海海洋石油局
中国建设银行	浙江大学	浙江嘉化集团股份有限公司	长庆油田装备有限公司
新疆旺旺食品有限公司	太仓阳鸿石化有限公司	无锡华东可可食品有限公司	中国核工业第二三建设公司